


PROJECT NAME:	CATALOG NUMBER:	
NOTES:	EIVTLIDE SCHEDLILE:	

Page: 1 of 2

# LED Slim (1.77") TROFFER Fixtures 4000K or 5000K Wattage Selectable w/ Emergency Battery

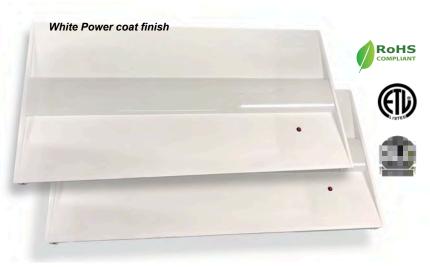

#### **PHYSICAL SPECIFICATION: 2 X 4**

Length: 47.76 "(1212mm) Width: 23.74" (603mm) Height: 1.77" (45mm) Weight: 11.91 lbs



**Emergency pack** E2-EBBU-10W



- Working min.90 mins & 10W after power
- Working with battery packs LiFePO4 6.4V 1500MAH
- DC constant current output at Emergency
- Mode
- Over-discharge protection
- Additional Relay that can control LED Driver
- Dimension:172\*90\*25MM



LENGTH - 13.3 INCHES WIDTH - 2.44 INCHES HEIGHT - 1.49 INCHES MOUNTING - 12.68 INCHES

# **Wattage Selectable**

2X4 Troffer: 24W-36W-42W-50W

2/3/4 4 Channel Options

CCT: 4000K, 5000K



#### PRODUCT DESCRIPTION:

V@ÁÒŒŸ/ÜÙŒŒÐ ÁÙJā ÁŠÒÖÁG ~^\Áã¢č \^ÁSI { àã ^•ÁæÁ |^^\Æã ] |^Á  $\mathring{a} \wedge \bullet \mathring{a} \} \stackrel{\text{\tiny $\vec{E}$}}{=} \mathring{a} O \stackrel{\text{\tiny $\vec{\Phi}$}}{=} O \stackrel{\text{\tiny $\vec{\Phi}$}}{=} ) \& O \stackrel{\text{\tiny $\vec{\Phi}$}}$ VÜÜÁ \$#|[¸•Án@Á•^¦Án[Á, ān&@Án^c,^^}Án[ˇ¦Ánáā-^¦^}ợA, ænazet^•LÁ GIY ĐHÎY ĐIGY ÁBÁN €Y ÈÀV@ ÁÖÇEÖVÜÜQCEBEN ÁHS&&N] o ÁF€€ÉÜ ÏXOEÔ ÉÐ ÁN Á @e Á@t @Á { ^ } Á ~ & & A } & Á ] Á [ ÁF GÍ ËFHEŠ { ĐY ĐỔ ĐỊ• [ ĐÁ ĐỊ• Á L [ ~ ^ \ Á &[{ ^• Án ~ ã] ] ^å Å, ão @Áse) ÁB, c^\* | ææ^å Án { ^ | \* ^ } & Áa ææc^ | ^ Áa ææ& ~ ] Én [ Áse Á d[Ás[{]|^Á, ão@Á cæe^Áse) åÁ[&æþÁs[å^•Êse) åÁ;|[çãå^Áse[]|^Áðã @æð]\*Á å 'la \* Á cæ ^• Á l Á \ ^! \* ^} & & • È

#### **FEATURES:**

- 100,000 Hours Life Expectancy
- ETL and DLC® Premium 5
- Size 2×4 available watt 24/36W/42W/50W (Tunable)
- CCT Available: 4000K, 5000K
- 125 lm/w
- · Optional: microwave sensor
- UL Driver
- 5 years and 50,000 hrs warranty
- 0-10V Dimming Standard
- Emergency battery back-up 90 mins

#### **APPLICATION:**

- · Residential Buildings, Home, Office, Meeting Room
- School, Library, Factory, Warehouse, Hotel;
- Parking Garage, Hospital, Commercial Center;
- Supermarket, Shopping mall;
- Train, Bus station, airport, etc

#### **TESTED DATA:**

- Technical Requirements Version: 5
- Classification: Premium
- Light Output: 3000lm-6250lm
- Wattage: 24w/36w/42w/50w
- Efficacy: >125 lm/W
- Power Factor: >.90
- CCT: 4000K, 5000K
- CRI: >80
- THD: <15 %
- Frequency: 50-60Hz
- Input Voltage: AC120-277V
- IP Rating: IP20
- Working Environment: –4°F-113°F
- Beam Angle: 120°
- Dimming Compatible: Yes- Standard
- Mercury Content: No Hg
- · Lens: Polycarbonate

#### **WARRANTY:**

E2 warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. Please see our complete warranty terms located at www.e2lightingusa.com.



# LED Slim (1.77") TROFFER Fixtures E2-TRS2x2ft/2x4ft Wattage tunable Series

## Wattage-Selectable

Model: E2-TRS2X424W-36W-42W-50W

Page: 2 of 2

#### **Ordering Information:**

Family	Size	Wattage	Controls	ССТ	Sensor option	Emergency battery back up
E2-TRS -	22 = 2X2	24 = 24W 36 = 36W	D= 0-10V Dimmable Blank= Non- Dimmable	40K = 4000K 50K = 5000K	1 = Microwave sensor (Blank) = No sensor	EM = 90 mins Emergency battery back up (Blank) = No
	24 = 2X4	24 = 24W 36 = 36W 42 = 42W			(DIAIIK) – INO SEIISOI	

### **Dimension:**

