

## LED Floating Gimbal Light

E2-DL-GIMBAL-15W-27/30/35/40/50K



5000K 4000K 3500K 3000K 2700K


## Product Description

The gimbal series down light is an energy efficient, damp location suitable, light solution for ceilings and similar scenarios, that can direct the light where it's most needed. Constructed from die-cast aluminum enclosure with great heat dissipation, it has a long service life, and offers 180 degree rotation, allowing to precisely direct the light.

## Features


- Mounting: Includes two spring loaded clips to attached to any ceiling material. The slim profile allows to be mounted under joists or duct work.
- Beam angle: 36°
- Warranty: 5 year warranty
- Quick Connect push-in terminals: Three "Quick connect" push-in terminals for fast and easy wiring.
- Operating Temperature: -40°C~40°C(-4°F~105°F)
- Environment: Suitable for damp locations. Suitable for insulated ceiling applications.
- Lifespan: 50000 hours

## Dimensions

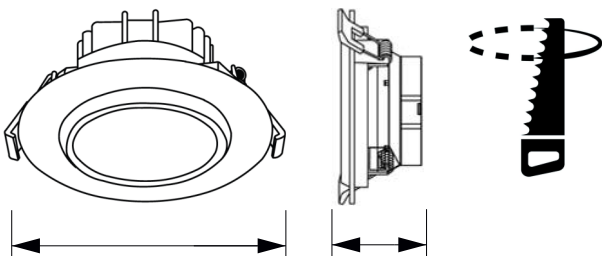

		Height	Cut out
15W	7.4 * 3.15 Inch	3.14 Inch	5.9 Inch

## Product Structure

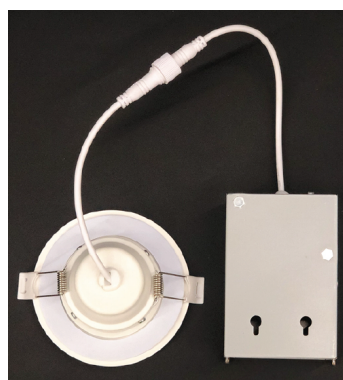


## Specifications

Item No.	Luminous	Light Source	CCT	Input Voltage	Wattage	CRI	LM/W	Finish
E2-FG-6360-D	1200lm	COB	5 CCT Tunable	100-277V	15W	≥80	81 LM/W	WHITE

## LED Driver



## Photometry

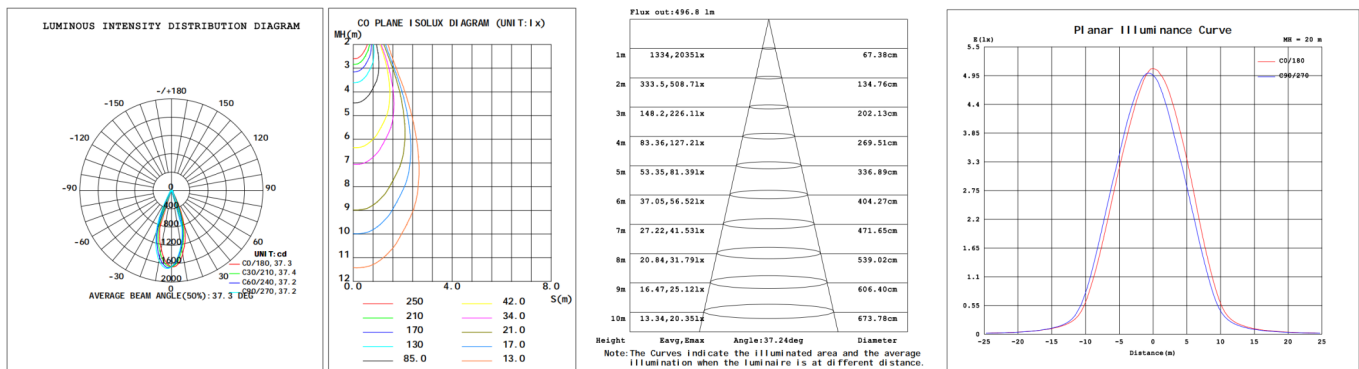

## Installation

Fig.1

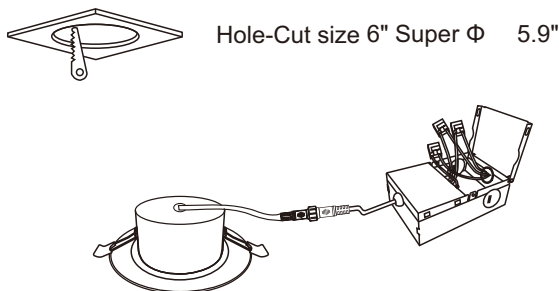


Fig.2




Fig.3

