

Mini Wall Pack Series

E2-WPM Mini Wall Pack Series 17W & 25W



Product Description



Cast in a traditional design, the LED wall mount luminaire offers the shape you've grown accustomed to coupled with the high-powered and energy efficient LEDs you want. Photocell for dusk to dawn operation. It is ideal for safety, security and any facilities.

Features


- Universal 120-277 VAC input voltage.
- Both drivers have a power factor >90%, THD <20%, and an expected life of 50,000 hours.
- Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Warranty: 5 year warranty

Dimensions

unit: mm/inch



Accessories

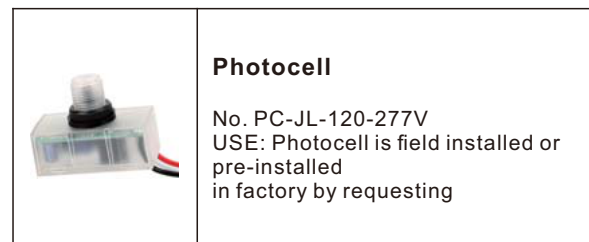

Specifications

Construction:

- Tempered UV coated at lens provide outstanding performance, uniformity and glare control.
- Optional clear lens or frosted lens as per applications.

Optics:

- Scalable Lumen Packages from 1,800 to 2,600 Lumens.
- Light engines are available in standard 3000K/4000 K and 5000 K (70 CRI) configurations.
- Suitable for operation in -40 to 40 ambient environments.

Performance Data

System Watts	Voltage	Lens	CRI	Lumens (3000K)	LPW (3000K)	Lumens (4000K)	LPW (4000K)	Lumens (5000K)	LPW (5000K)
17W	120-277VAC	Clear Lens	70	1800lm	106 lm/W	1900lm	112 lm/W	1950lm	115 lm/W
25W	120-277VAC	Clear Lens	70	2500lm	100 lm/W	2550lm	102 lm/W	2600lm	104 lm/W

Electrical Data


Number Of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	250	17	120	0.14
		17	208	0.08
		17	240	0.07
		17	277	0.06
1	250	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09

DLC Model NO.

System Wattss	Voltage	CCT	Lens	DIC NO.	DIC Calassification
17W	120-277V	3000K	Clear Lens	WM17W27V30K[D,B,W][Blank,P0]	Standard
		3500K	Clear Lens	WM17W27V35K[D,B,W][Blank,P0]	Standard
		4000K	Clear Lens	WM17W27V40K[D,B,W][Blank,P0]	Standard
		5000K	Clear Lens	WM17W27V50K[D,B,W][Blank,P0]	Standard
25W	120-277V	3000K	Clear Lens	WM25W27V30K[D,B,W][Blank,P0]	Standard
		3500K	Clear Lens	WM25W27V35K[D,B,W][Blank,P0]	Standard
		4000K	Clear Lens	WM25W27V40K[D,B,W][Blank,P0]	Standard
		5000K	Clear Lens	WM25W27V50K[D,B,W][Blank,P0]	Standard

Photometry

Clear Lens

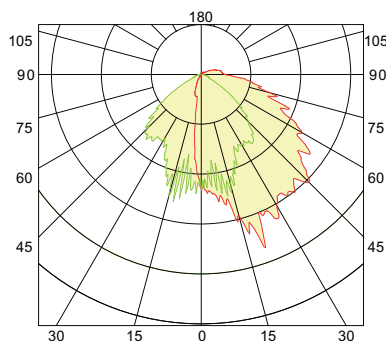

Frosted Lens

