

E2-SETE30 Double Face Exit Sign

NEW

Test Button & Indicator Light

DIMENSIONS



PRODUCT DESCRIPTION:

The E2-SETE30 Exit Sign with integrated emergency battery backup is among the latest versions of this industry standard fixture. This sign is equipped with a self diagnostic test button and an indicator light showing that the emergency battery backup system is operating properly.

FEATURES AND STANDARDS:

- Injection-molded thermoplastic ABS housing 5VA flame rating.
- Innovative, easy installation in minutes.
- Red letters.
- Double face.
- 120/277VAC dual voltage operation.
- Built-in 1.2V 700mAh rechargeable Ni-cd battery for minimum 90 minutes emergency operation.
- Maximum 24 hours full recharge time.
- Test switch and charge indicator.
- UL and CUL listed.

WARRANTY:


E2 warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. Please see our complete warranty terms located at www.e2lightingusa.com.

Product Number	Wattage	Color	Certifications	Dimmable	Voltage	Lumens	Working Hours	CRI
E2-SETE30	4W @ 120, 5.2W @ 277V	RED	UL DAMP LOCATION LISTED	NO	120- 277V		EMERGENCY MODE-90min.	

Side Mount



Wall Mount

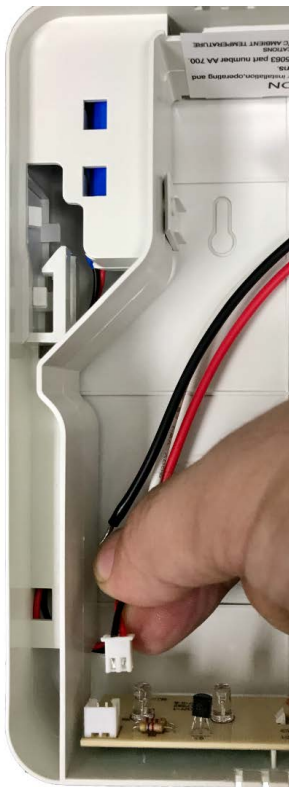

* Must connect internal battery before fixture installation