

Emergency LED T8 Tube


E2-T8-4FT-18W-EBBU-CCT



ETL CLASSIFIED



Intertek

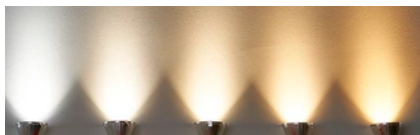

5000K 4000K 3500K 3000K 2700K



Dimensions

Product Description:

The E2 Emergency LED T8 Tube light is a safe and reliable product, made of environmentally friendly materials. The built-in constant current driving power supply provides a stable current for the light, with over current/overload/over voltage protection functionality. Tunable CCT from 2700K to 5000k.

Features

- AC 100-277V input voltage
- 2700K / 3000K / 3500K / 4000K / 5000K
- Built-in 6w emergency battery backup
- Aluminum heat-sink for long lifespan
- ETL


Specifications

Input Voltage	100-277VAC	Emergency Output Power	6W
Input Frequency	50/60 Hz	Emergency Mode Lumen	780 Lumens
Battery Specification	6.4V	AC Output Power	18 W
Emergency Time	1.5H	AC Mode Lumen	2340lm

Applications

Ideal for school, hospitality, retail, office, home etc.

Wiring Diagram

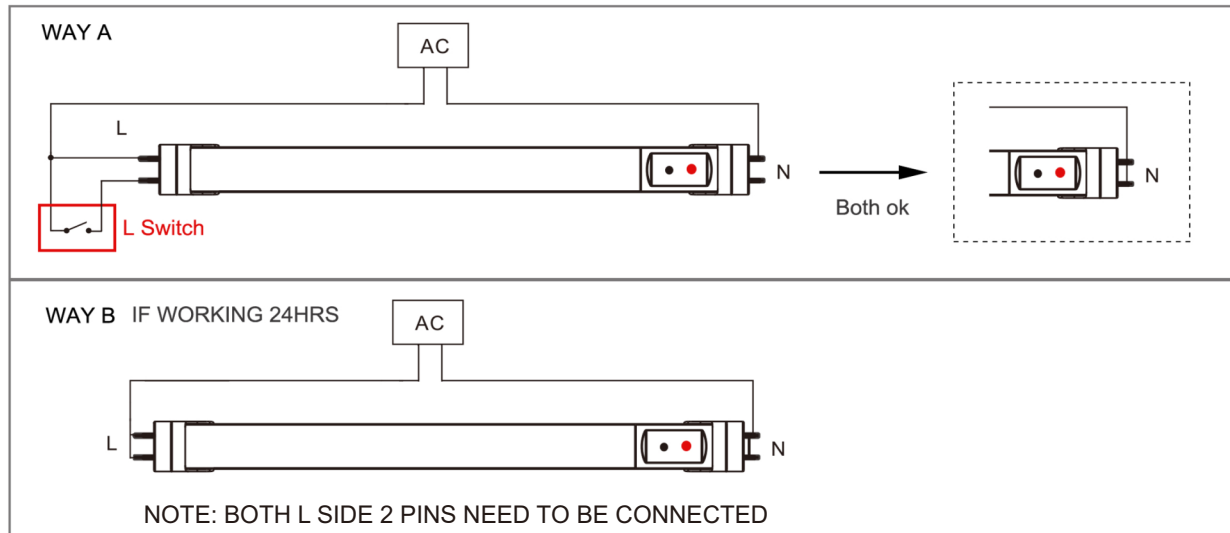

CAUTION:

Please read this manual carefully before installing emergency tubes.

Please turn off AC power before rewiring and installation.

Ensure that L and N of the tube are properly connected to L and N of the AC power supply!



Instructions

	A. Finish installation, Push CCT button to change CCT 5000K-4000K-3500K-3000K-2700K-Turn Off repeat
	B. Test Button 1. Push test button when AC power is on, then switch on/off LED T8 to enter emergency mode 2. When power is off and the light switches to emergency mode, hold down the test button for 3 seconds and turn off the T8. Then, it will only work after AC power is on
	C. LED Indicator Charing: Slow flickering Issue: Quick flickering Normal State: Turned off Emergency Mode: Turns on