

Outdoor Bug Eye Dual Head Emergency Light



90 Mins Battery Backup



Product Description:

This LED Emergency Light is safe for outdoor use. It has a plastic cover that protects it from rain and snow. These lights are widely used outside of offices, hotels, and other businesses. It is suitable for 32°F-104°F harsh environments

Features

- Injection-molded thermoplastic ABS housing
- 5VA flame rating.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Wet location listed.
- 2 x 1.2W led lamp heads @6500K
- Universal J-box mounting pattern.
- 120/277VAC dual voltage operation.
- Built-in 3.6V 700mAh rechargeable NiCd battery for minimum 90 minutes emergency operation.
- Maximum 24 hours full recharge time.
- Test switch and charge indicator.

Dimensions

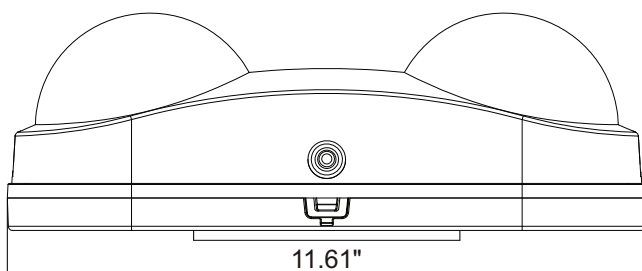

Test Button Installation

1. Loosen the screws on the housing




2. Remove the housing from the light base



3. Connect wires with external power supply




4. Connect the battery terminal



Specifications

Product Number	Information	Certifications	Dimmable	Voltage	Working Hours
E2-STEVO10-IP65	2x12pcs SMD 2835 LED lamp heads	UL Wet LOCATION LISTED	NO	120-277V	EMERGENCY MODE-90min.

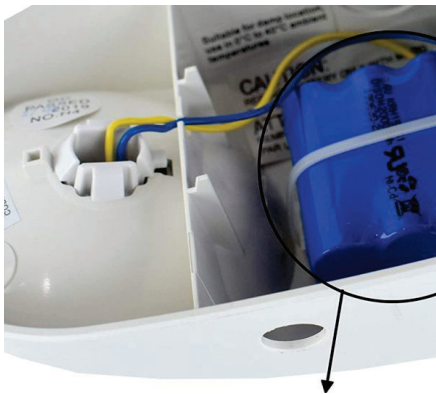

700mAh Large Capacity

24hrs charging for at least 90mins emergency lighting



*Must connect internal battery before fixture installation