

LED Vapor Tight

E2-VP-4-32/40/50W-35/40/50K-E



S=Sensor

E=EBBU



ETL CLASSIFIED




Product Description:

E2 Lighting's Non-Cutoff Wall Pack is a highly efficient multi-function fixture that provides a long-lasting and energy saving lighting solution. This fixture is equipped with an internal CCT color temperature and wattage tuning switch. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

Features

- ETL/CETL/DLC certificate.
- Pre-wired 10W emergency battery with indicator push button.
- 1250lm in battery mode for 90 mins.
- Wet location rated IP65.
- PC and aluminum housing.
- CCT tunable.
- UV-resistant polycarbonate refractor lens.

Dimensions

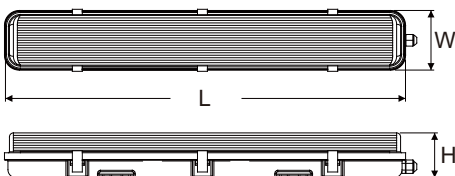


Model	L×W×H
E2-VP-4-32/40/50W-35/40/50K-E	1200x110x88 (mm)/ 47.2"x3.86"x3.46"


Specification

Part No.	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
E2-VP-4-50W-3CCT-E	30W	AC100-277V	3750lm	125lm/W	3500K 4000K 5000K	120°	>80	>0.9	5Years
	40W		5000lm						
	50W		6250lm						

Testing Report

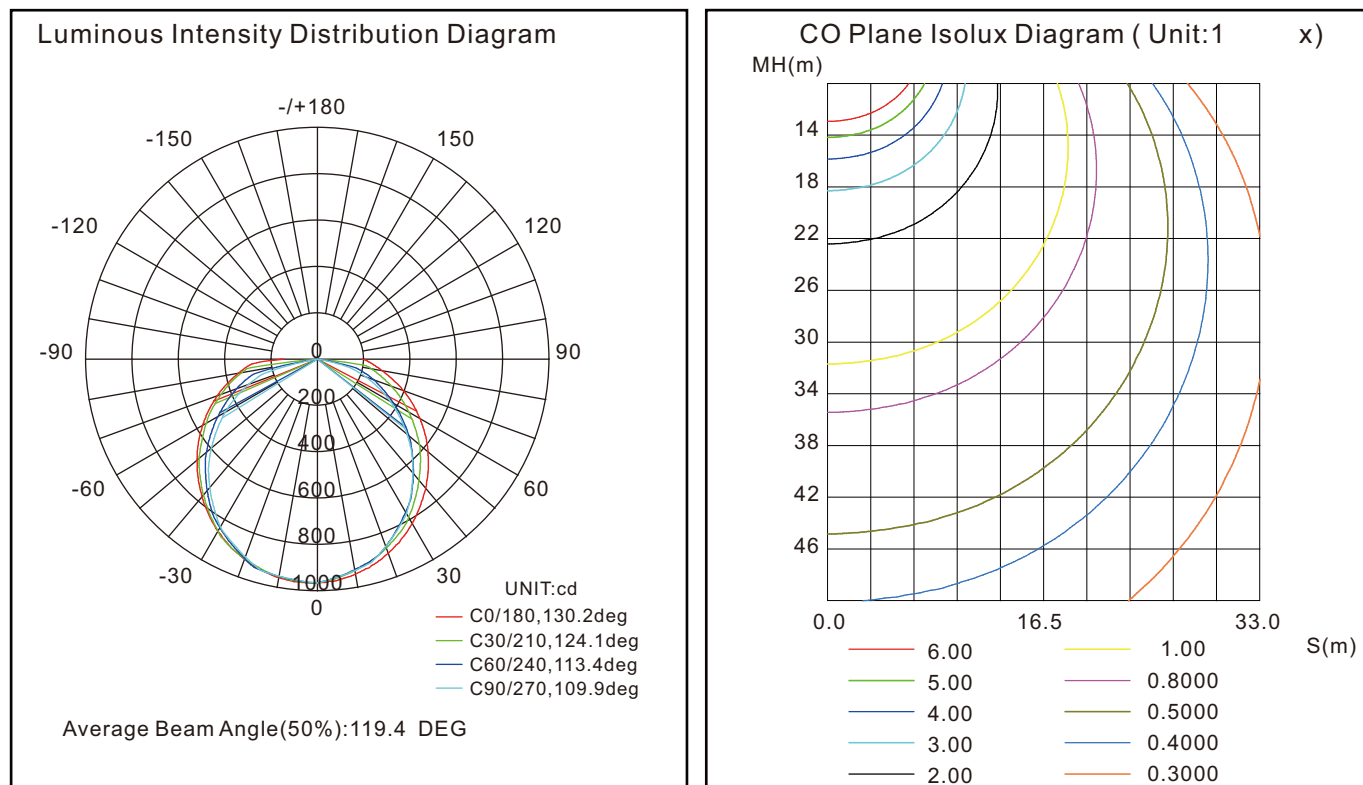


Applications

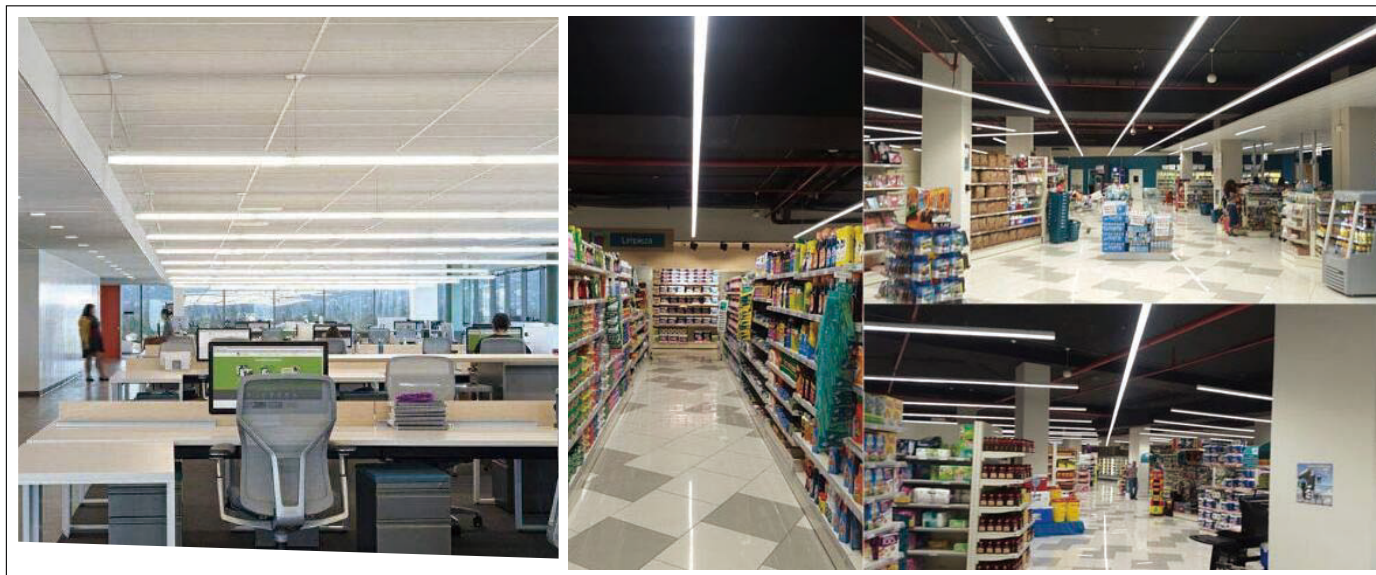


Installation manual

A. Surface-mounted installation


Step 1. Punch a hole in the wall and put the expansion tube inside.

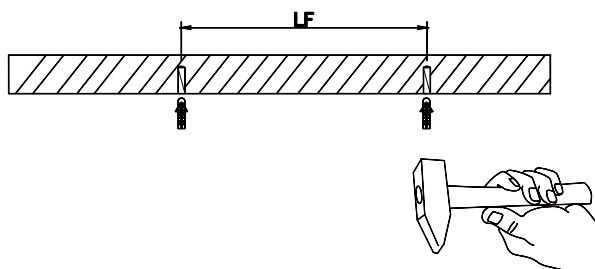


Step 2. Fix the buckles in parallel using screws with distance

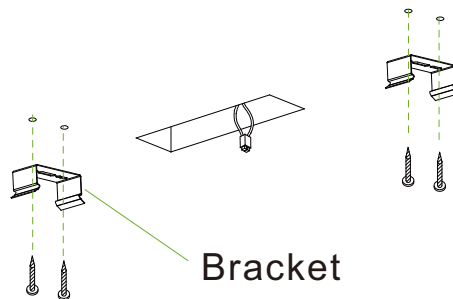


Step 3.
Customer's own external hose

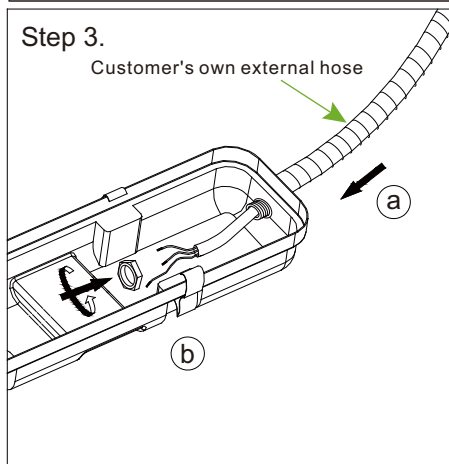


Step 4.

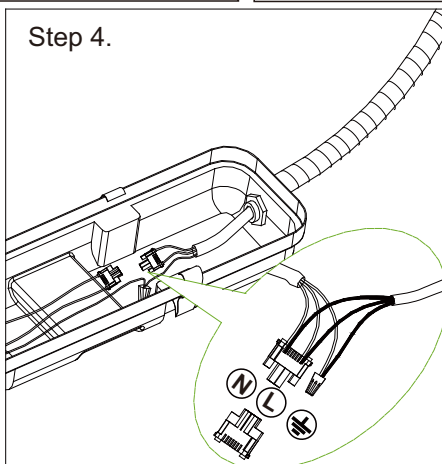


Step 5.

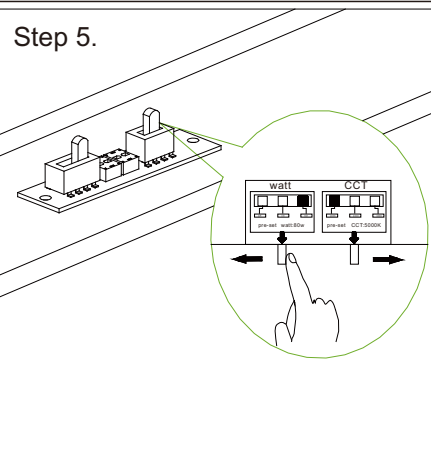


Step 6.

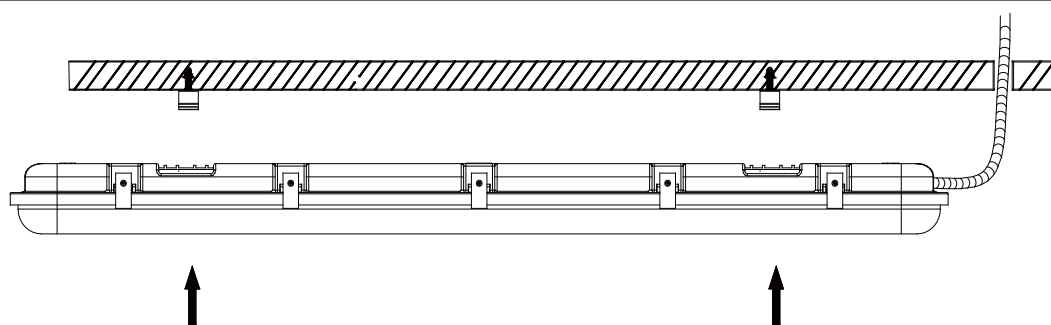

Step 7.

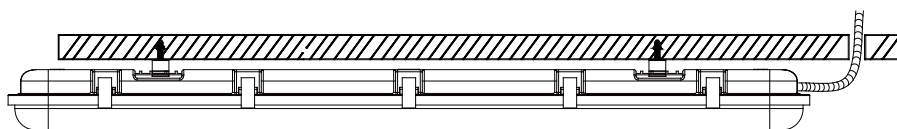



Step 8.



Turn on the switch

B. Suspending Installation

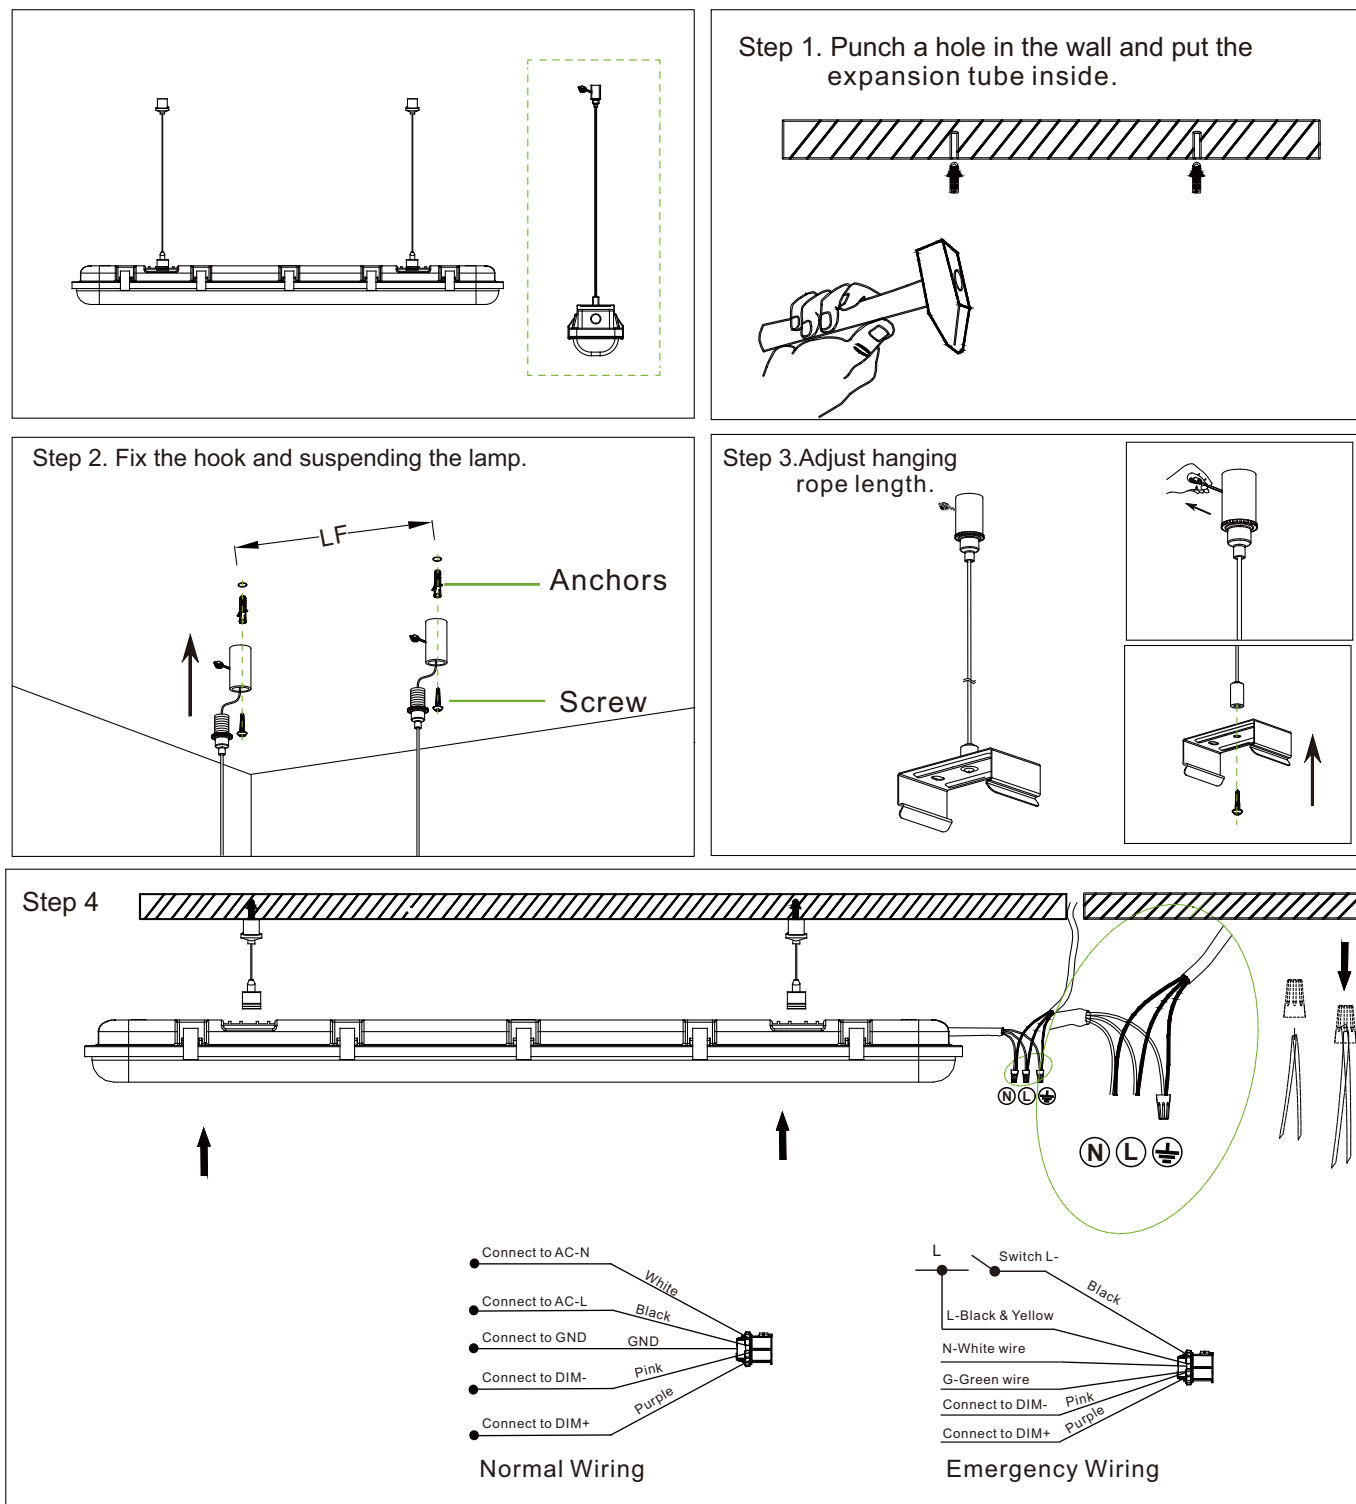

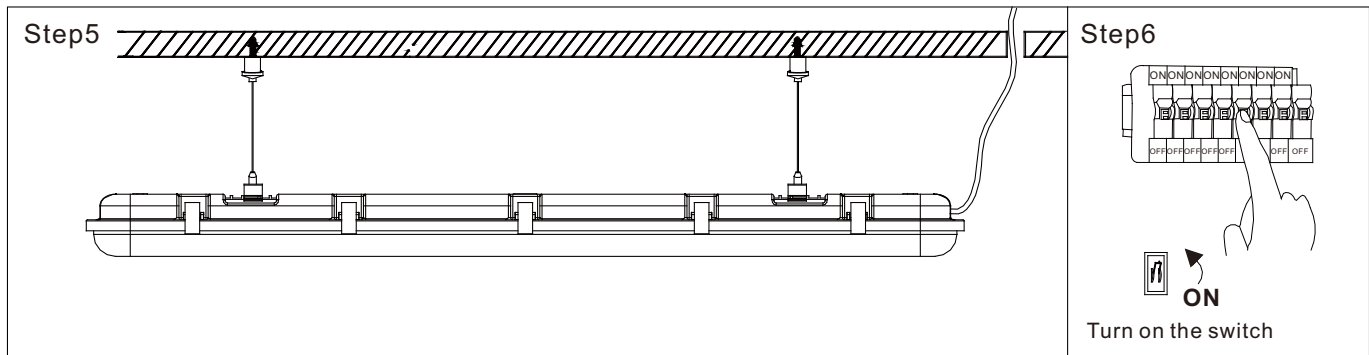

Important

Read these instructions carefully before installation. Keep them for further reference. Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation. This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.

WARNING



Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems.

If not qualified, contact a qualified electrician.



Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation.



Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.



DO NOT install fixture on unstable, loose or easily breakable surface.



DO NOT exert force on the surface of the fixture.

Notes

1. Installation and maintenance must be completed by electricians or professionals.
2. Cut off the power before installation and maintenance.
3. Thermally insulating material should not cover the fixture.
4. Keep the fixture dry, clean, and away from corrosive substances.
5. Working temperature: -4°F~113°F, storage temperature: -22°F~140°F.