

LED Under Cabinet Light



Wattages: 5W, 9W, 14W, 18W



The LED Under Cabinet Light series is a next generation, direct wire under cabinet fixture that Provides task or accent lighting in commercial, retail, hospitality and residential applications.




- ◆ UL 1598 suitable for damp locations
- ◆ High efficiency LED Driver, the wide range input voltage AC120V.
- ◆ ENERGY STAR certified product (for 3000K, 4000K, 5000K) and Title 24 qualified.
- ◆ Dedicated 120V Models are FCC title 47 CFR, Part 15, Class B for residential and commercial applications.

Structure Features:

- ◆ Shell materials: Metal & PC
- ◆ Finish: White (Standard)
- ◆ Length: 229/305/457/533/610/838/1067mm (9"/12"/18"/21"/24"/33"/42")
- ◆ Width: 89.5mm (3.5")
- ◆ Depth: 29mm (1.14")
- ◆ Net weight : 9-42IN: 0.36/0.46/0.58/0.71/0.77/1.1/1.4(kg) 0.79/1.01/1.28/1.57/1.70/2.43/3.09 (lbs)

DIMENSION:

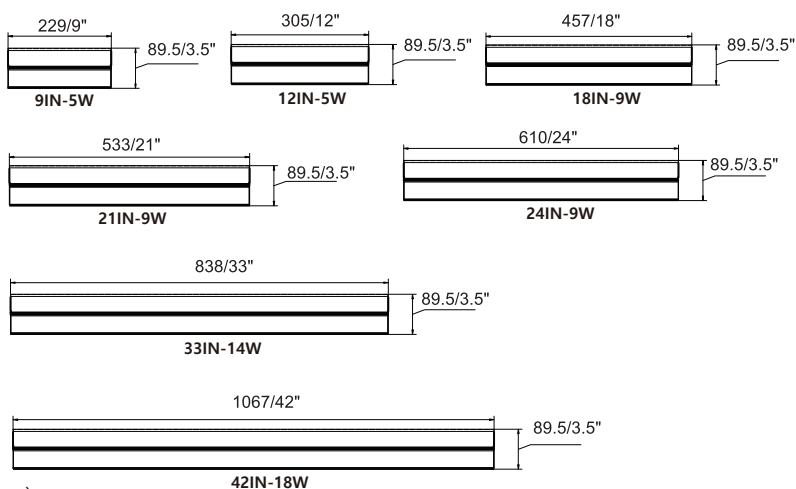

SPECIFICATION

WATTAGE	5 W	10 W	14 W	18 W
LUMEN	368.44 lm	675.74 lm	1061.9 lm	1283.7 lm
EFFICACY	> 81.37 lm/W	> 77.3 lm/W	> 77.72 lm/W	> 73.86 lm/W
CCT	3000K, 4000K, 5000K			
CRI	90			
INPUT VOLTAGE	AC120V			
BEAM ANGLE	117°			
POWER FACTOR	0.90			
DRIVER EFFICACY	90%			
DIMMING	traic dimming			
LIFE S	over 50,000 hrs			
WORKING TEMPERATURE	-22°F ~ 113°F			
STORAGE TEMPERATURE	-40°F ~ 176°F			
OUTDOOR RATING	damp location			
CABLE	none			
WARRANTY	5 year limited			

LED Under Cabinet Light

Wattages: 5W, 9W, 14W, 18W



Power Switch

Optical lens is made of high quality PC material to make the light even and soft.



High performance, galvanized steel heat sink transfers heat from the light engine to the environment, via large cooling fins, drawing heat away from the fixture, and extending the lifespan of the LEDs.

CCT Switch



MOUNTING:

- ◆ Surface Mounting

APPLICATIONS:

- ◆ Under and over cabinets
- ◆ Office lighting
- ◆ Display cases
- ◆ Coves
- ◆ Task lighting
- ◆ Utility / work areas

Packaging information

◆ E2-UC-9IN-5W-12-30/40/50K

274mmX220mmX206mm(10 Pcs/CTN)
(10.79"X8.66"X8.11")

◆ E2-UC-12IN-5W-12-30/40/50K

320mmX220mmX206mm(10 Pcs/CTN)
(12.60"X8.66"X8.11")

◆ E2-UC-18IN-9W-12-30/40/50K

472mmX220mmX206mm(10 Pcs/CTN)
(18.58"X8.66"X8.11")

◆ E2-UC-21IN-9W-12-30/40/50K

548mmX220mmX206mm(10 Pcs/CTN)
(21.57"X8.66"X8.11")

◆ E2-UC-24IN-9W-12-30/40/50K

626mmX220mmX206mm(10 Pcs/CTN)
(24.66"X8.66"X8.11")

◆ E2-UC-33IN-14W-12-30/40/50K

853mmX220mmX206mm(10 Pcs/CTN)
(33.58"X8.66"X8.11")

◆ E2-UC-42IN-18W-12-30/40/50K

1082mmX220mmX206mm(10 Pcs/CTN)
(42.60"X8.66"X8.11")

LED Under Cabinet Light






Wattages: 5W, 9W, 14W, 18W




PHOTOMETRICS

For complete IES files, please visit our website.




E2-UC-9IN-5W-12-30/40K

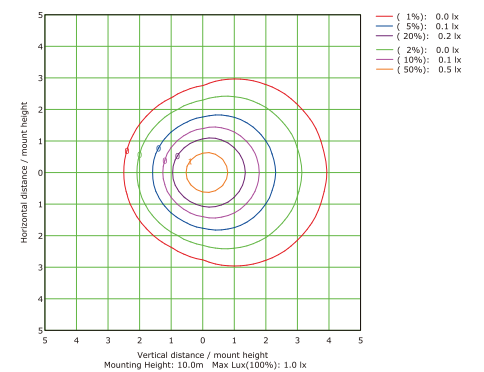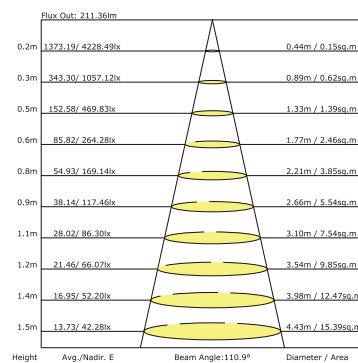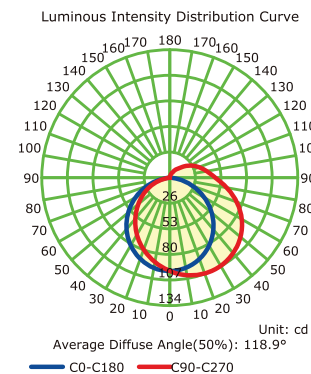




E2-UC-12IN-5W-12-30/40K

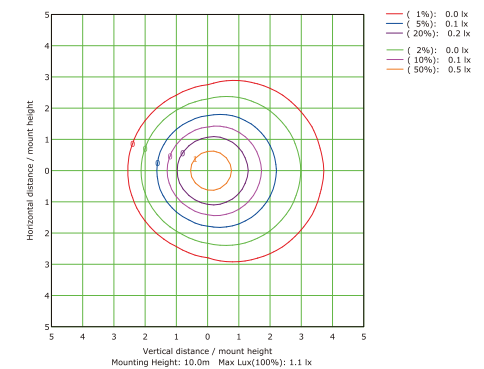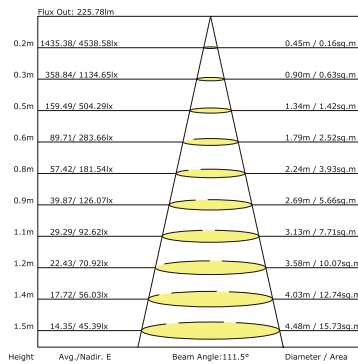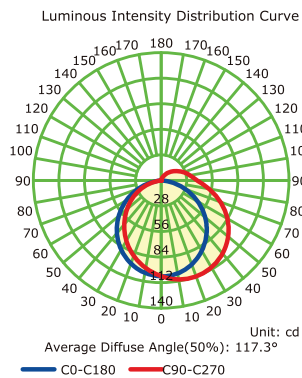

E2-UC-18IN-9W-12-30/40K

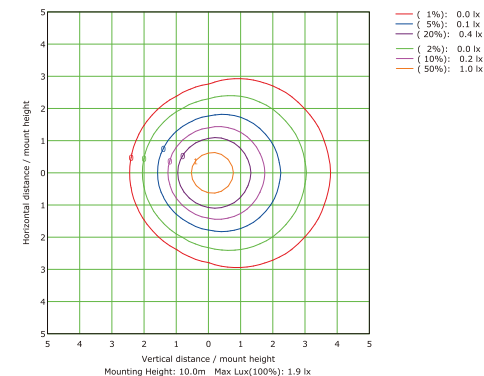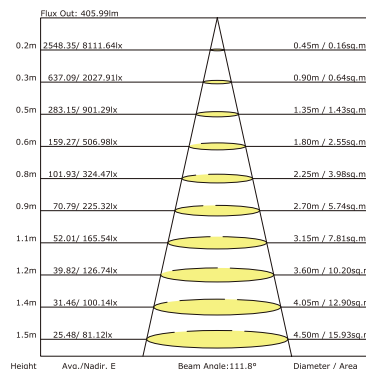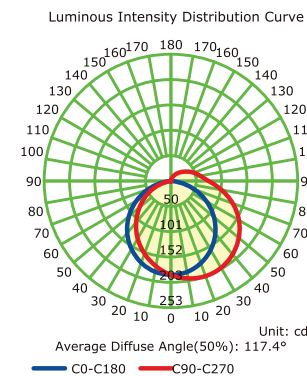

E2-UC-21IN-9W-12-30/40K

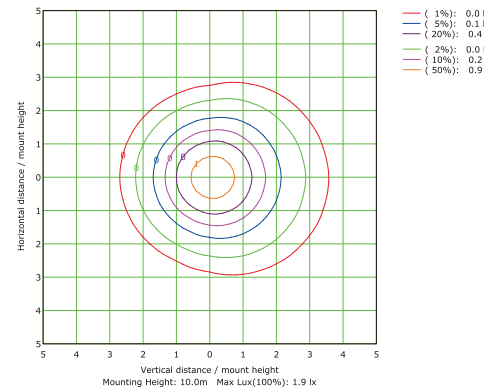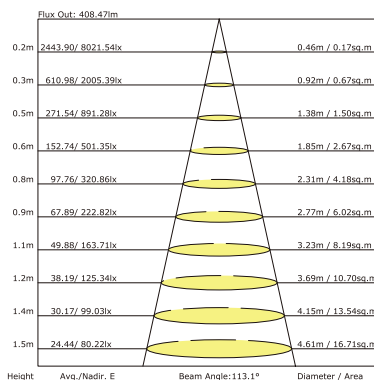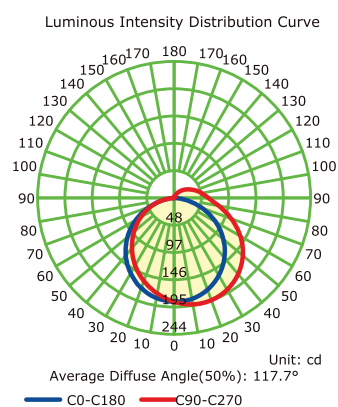

LED Under Cabinet Light






Wattages: 5W, 9W, 14W, 18W

PHOTOMETRICS

For complete IES files, please visit our website.




E2-UC-24IN-9W-12-30/40K

Luminous Intensity Distribution Curve

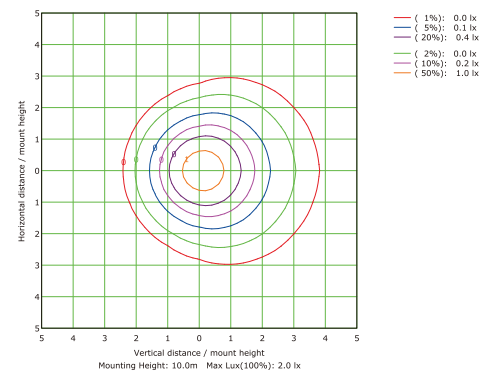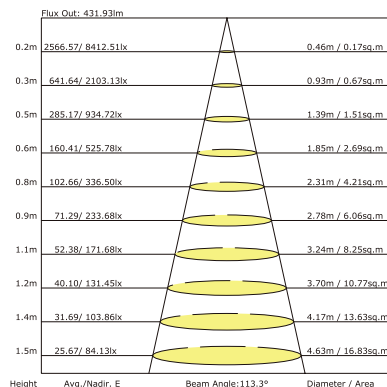

E2-UC-33IN-14W-12-30/40K

Luminous Intensity Distribution Curve

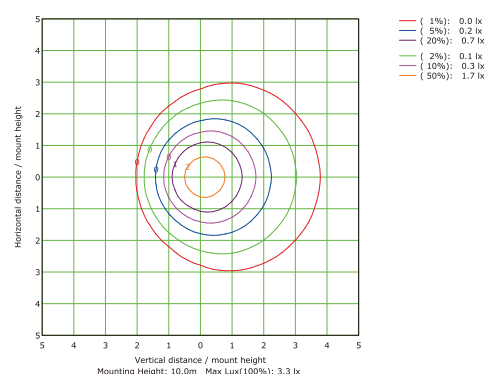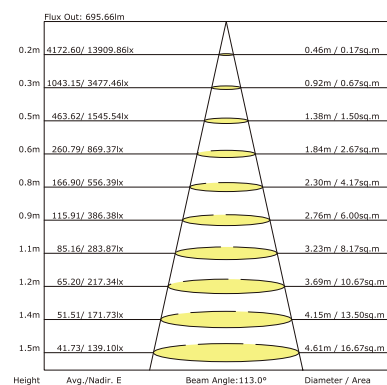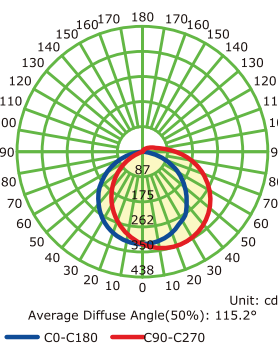

E2-UC-42IN-18W-12-30/40K

Luminous Intensity Distribution Curve

