

Full Cutoff Wall Pack

E2-WPF-R10-30/40/60/80W-30/40/50K





Product Description

Light up your outdoor area with best LED Full Cut - Off Wall Pack. It is a high efficient lighting solution that provides a long - lasting and energy - saving. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

Features

1. ETL/cETL/DLC premium certificate.
2. Easy installation.
3. Wet location rated IP65.
4. Durable die-cast aluminum housing.
5. Photocell and motion sensor options.
6. UV-resistant polycarbonate refractor lens.
7. Emergency power option 4W & 8W operating time 1.5 hours.
8. TypeII / TypeIII / TypeIV distribution optics standard.

Physical Dimensions

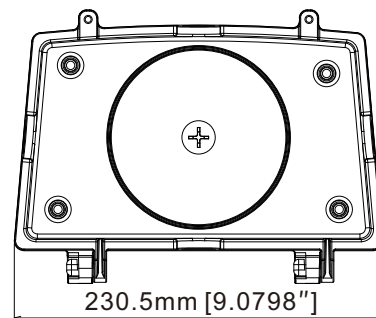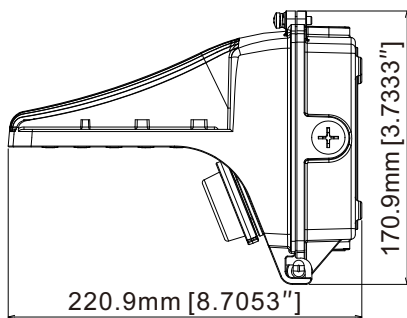

30-60W(120-277VAC&120-347VAC) / 80W(120-277VAC)

Specifications

Model No.	E2-WPF-R10-30/40/60/80W-30/40/50K			
Input Power	30W	40W	60W	80W
Lumen	3900LM	5200LM	7800LM	10400LM
Efficacy	130LM/W(±5%)			
Input voltage	120-277VAC /120-347VAC			
Color Temperature	3000K Less 2% Blue light CCT			
THD	< 20%			
Surge Protection	L-N: 2KV L-N: 4KV			
LED Type	3030			
Viewing Angle	Type II / Type III / Type IV			
Operating Temperature	-22°F to 113°F (-30°C to +45°C)			
Operating Humidity	RH<90%			
Storage Temperature	-40°F to 158°F (-40°C to +70°C)			
Storage Humidity	RH<95%			
IP Rating	IP 65			
Power Factor	≥0.90			
Frequency	50/60Hz			
Certification	c ETL / ETL / DLC Premium			
Housing	Die-cast Aluminum			
Finish	Black / Bronze / Customized (Optional)			
Driver Brand	Weled Power			
Additional function	0-10V / 1-10V / Photocell/Microwave Motion Sensor /Power Adjustable			
Life Time	L70 @ 54,000Hrs			
Warranty	5 Years			

Applications

Outdoor wall-mount applications: building facade, commercial, industrial, retail, hospitality buildings that demand long service life and low maintenance.

