

Oval LED Emergency Wall Pack Light

Date: Location:

Product: Project:

Quantity: Catalog#



EMERGENCY TEST BUTTON
 • Press and hold the convenient emergency test button to switch the fixture to emergency mode
 • Release the button to return to the fixture's normal state

FEATURES

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- UL-94V-0 flame rating, fire-resistant
- IP65 protection
- Power consumption: 5W max
- Output: Super bright COB LED 15W 1870lm for general mode
- 600lm for emergency mode
- 4.8V 1800mAh Nickel Cadmium Battery
- Backup time: >90minutes
- Charging time: 24 hours
- Overcharge & Over-discharge protection
- Conversion time: <0.2second
- Operating temperature: -10°C~40°C
- Dimension: 10.4"x6.5"

PERFORMANCE

Model NO	Emergency Duration	Wattage	Voltage/Current Input		Lumen Efficiency	Kelvin Options
			120V	277V		
E2-WP06 -15W	90 minutes	15W	0.14A	0.05A	120LM/W	3500/4000/5000K

Special functions

- 1、 When the power supply system is out of power, the lamps start the emergency system to turn on the lights, and the duration can be up to 90 minutes.
- 2、 The lamp has a light-sensing function, when the light < 3FC lamps are automatically turned on, and the light > 3FC lamps are automatically turned off

Electric Characteristic

Model NO	Input voltage	Color Temperature	Efficiency	Power		CRI	Light Efficiency	Working temperature	Certificate
				Input power	EBU power				
E2-WP06 -15W	120-277V/AC	3.5K/40K/50K	120LM/W	15W	5W	>72	D	-10°C+40°C	UL

PRODUCT ORDERING GUIDE

E2 WP06 15W
 1 2 3


E2 - WP06 15W

E2 E2 Lighting

EW Emergency Wall Pack


15W Power 15W

DIMENSION

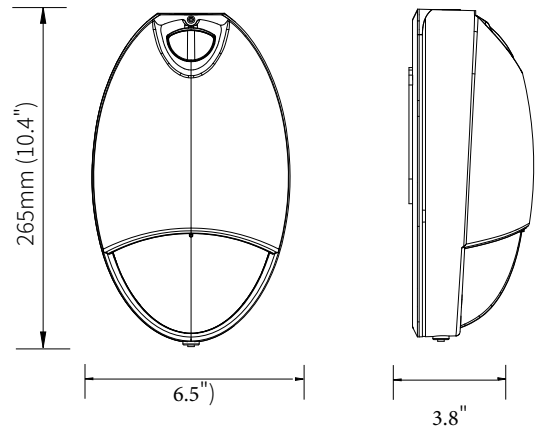

DIMENSION


E2 EW15W Input Power

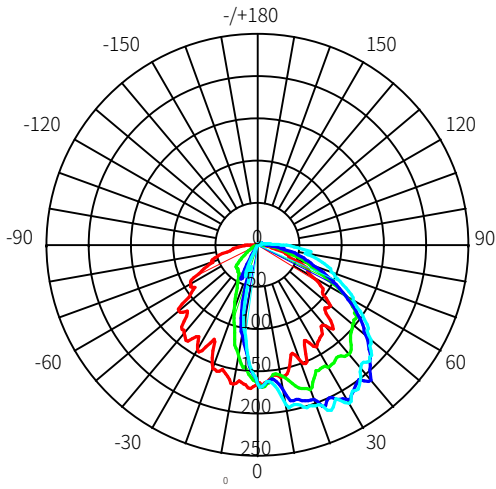

AVERAGE BEAM ANGLE(50%): 86.4°

UNIT:CD
 Test Number:E2W15W — C0/180,120.1
 Lumens:1200LM — C30/210,120.9
 Test Number:12W — C60/240,111.3
 Test Number:5000K — C90/270,131.4

E2 EW 15W Empower

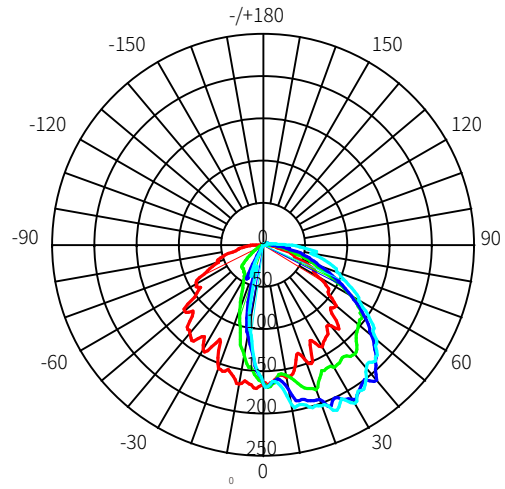

AVERAGE BEAM ANGLE(50%): 86.4°

UNIT:CD
 Test Number:E2W15W — C0/180,120.1
 Lumens:400LM — C30/210,120.9
 Test Number:4W — C60/240,111.3
 Test Number:5000K — C90/270,131.4