



E2 Lighting International Inc.

Project Name: _____ Catalog Number: _____

Notes: _____ Fixture schedule: _____

Fire Rated LED Panel Light

E2-DL-SLIM-4inch-9W-27/30/35/40/50K-F
E2-DL-SLIM-6inch-12W-27/30/35/40/50K-F
E=Emergency Option



Product Description:

This Down light built with 190°C, fireproof cotton expands five fold to block smoke and flames. These lights offer 120 minute fire ratings to ensure building safety


Features

- 2 Hour Fire Rated without Additional Housing or Hardware
- Type IC & Air-Tight Rated – No Housing Required
- Heat Resistant Steel Casing Provides up to 2 Hour Fire Protection
- Heavy Duty Steel Spring Clips for Easy Installation
- Plenum Rated Cable for Commercial Installations
- Driver Inside Connection Box – No Junction Box Needed
- 5 CCT User Selectable Light Colors
- CRI 90+ for True Color Rendering

Materials--flame retardant material
Metal Fireproof Paint
Fireproof Cotton
Fully Sealed Iron Back Cover
Metal Cilps
Metal Wire Connector



Physical Dimensions

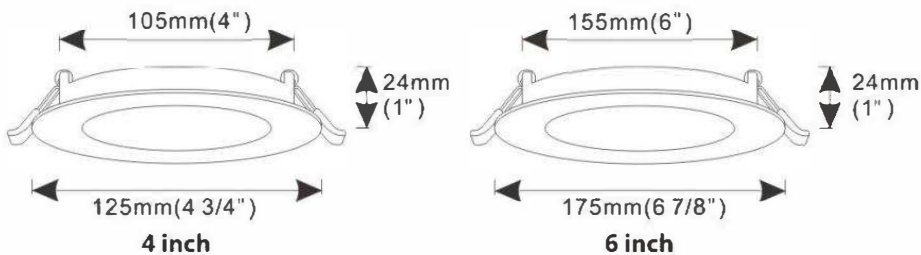

Phone: 469-638-3592 Fax: 213-477-2257 Web: www.e2lightingusa.com E-mail: sales@e2lightingusa.com




Specifications

Item No.		Diameters	Cut Out	CCT	Input Voltage	CRI	Carton Size	Dimmable
E2-DL-SLIM-4inch-9W	9W	OD 125mm H 24mm	105mm	2700K- 5000K	100-277V	≥ 90	54*28*34.5cm	TRAC Dimming
E2-DL-SLIM-6inch-12W	12W	OD 175mm H 24mm	155mm				155mm 39*39*32cm	

Product Structure




Photometry

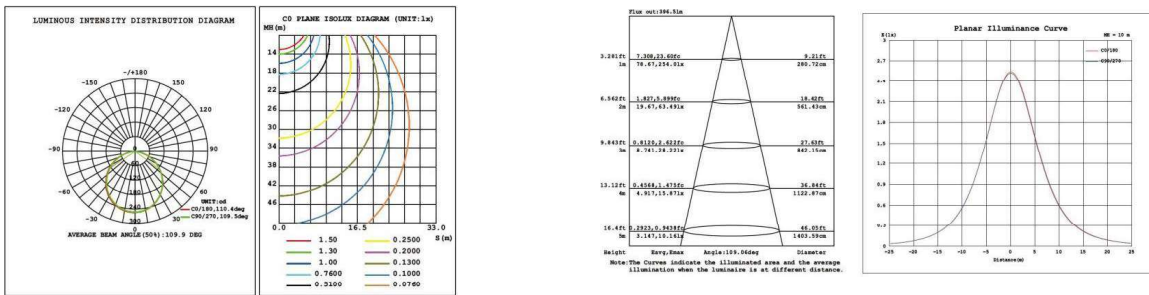

Installation

Fig.1



or




Fig.2




Fig.3

