



4FT Tri-Proof Linear



Features

Housing: Plastic/Aluminum

Interior Thermal Conductivity: 226W/m·K

Led: Bridgelux

CRI: Ra >80

SDCM: <6

Power Factor: >0.95

THO: <15

Driver: XZ power

Driver Efficiency: >90% Protection: OTP, OCP, OVP, SCP

Surge Protection: 2KV Waterproof: IP65

Impact Test: IK08

Electrical: 100-277V, 50/60Hz Operating

Operating Temperature: -20~40° X

TM21: L80B10>50,000H

Lifetime: 50,000H





PC housing

UV resistant and anti-yellowing

Aluminum Heat Sink Inside

Better heat dissipation and lumen maintenance

High Brightness 1401 m/W

Bridgelux led is used to achieve high brightness


.....

In order to help our customers lower labor costs during installation, our Lock & Lock series tri-proof light's end-cap is designed with screw-free lock buckles on each end. It can be opened very easily so that customers can rewire the terminal inside the housing. 3XL, 3x1 .5mm², 3x2.5mm², 5x1 .5mm² and 5x2.5mm² wire are all optional to be linkable in series.


.....

**Screw
Free**



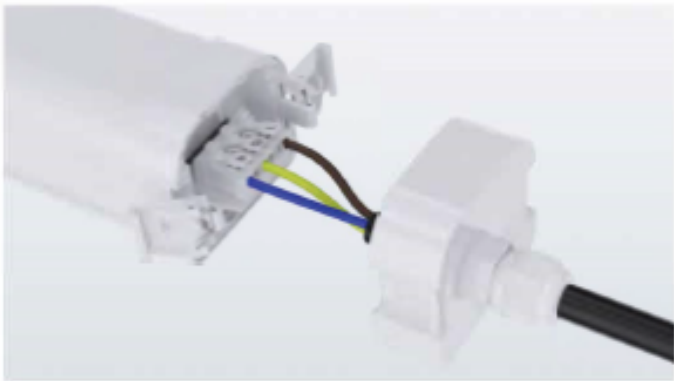

3-core Terminal

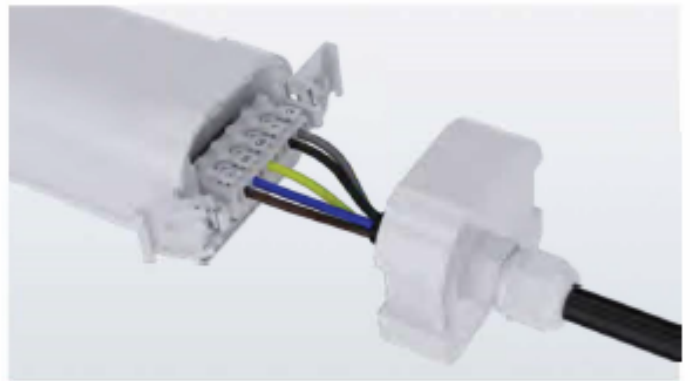

5-core Terminal

With Terminal Inside

3 core or 5 core terminal is available to be rewire inside easily



One Connector



Two Connectors


PG connector

The PG connector on each end cap can be extended to 2pcs in order for easy connection

PG connector

The PG connector on each end cap can be extended to 2pcs for easy connection



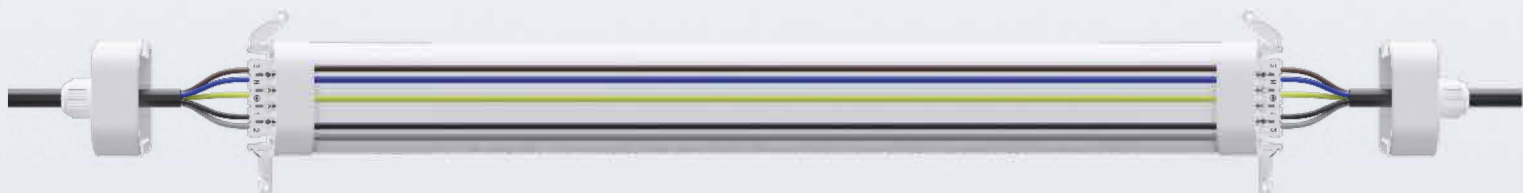

With Wire Through


3x1.5mm² / 3x2.5mm² / 5x1.5mm² / 5x2.5mm² wire though are all available to be linkable in series

Linkable in Series



Linkable

Linkable in series. Loading capacity is up to 14400w

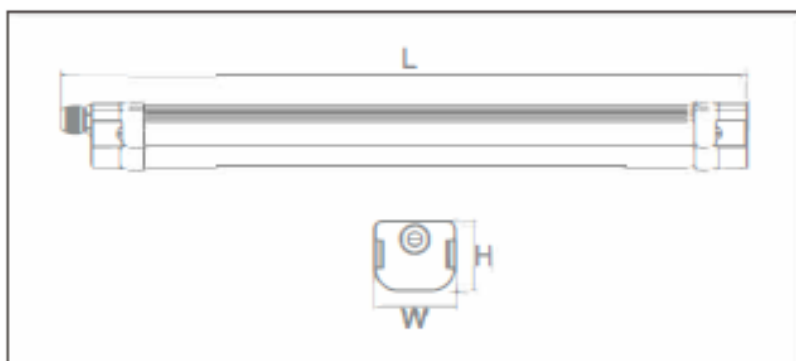

Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave

Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
TP020LU2F-BX	20W	100-277V	2800LM	>80	IP65	L25.90*W2.91*H2.51"
TP040LU4F-BX	40W	100-277V	5600LM	>80	IP65	L 40.00*W2.91*H2.51"
TP060LU5F-BX	60W	100-277V	8400LM	>80	IP65	L59.13*W2.91*H2.51"