

LED Floating Gimbal Light

E2-DL-GIMBAL-15W-27/30/35/40/50K




Product Description

The gimbal series down light is an energy efficient, damp location suitable light solution for ceilings and similar scenarios that can direct light where it's most needed. Constructed from die-cast aluminum, the enclosure features great heat dissipation, a long service life, and 180 degree rotation, allowing it to precisely direct its illumination.

Features


- Mounting: Includes two spring loaded clips to attach to any ceiling material. The slim profile allows it to be mounted under joists or duct work.
- Beam angle: 36°
- Warranty: 5 year warranty
- Three "Quick connect" push-in terminals for fast and easy wiring.
- Operating Temperature: -40°C ~ 40°C (-4°F ~ 105°F)
- Environment: Suitable for damp locations and insulated ceiling applications.
- Lifespan: 50,000 hours

Dimensions

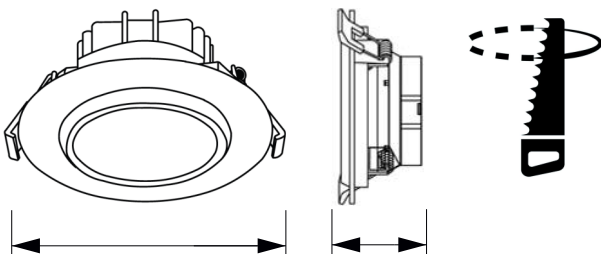

		Height	Cut out
15W	7.4 * 3.15 Inch	3.14 Inch	5.9 Inch

Product Structure

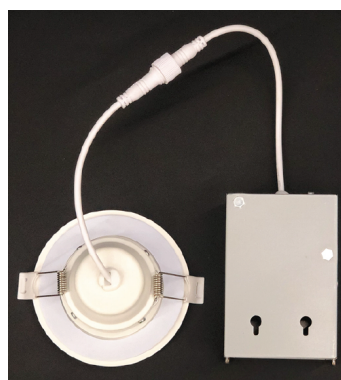




Specifications

Item No.	Luminous	Light Source	CCT	Input Voltage	Wattage	CRI	LM/W	Finish
E2-FG-6360-D	1200lm	COB	5 CCT Tunable	100-277V	15W	≥80	81 LM/W	WHITE

LED Driver



Photometry

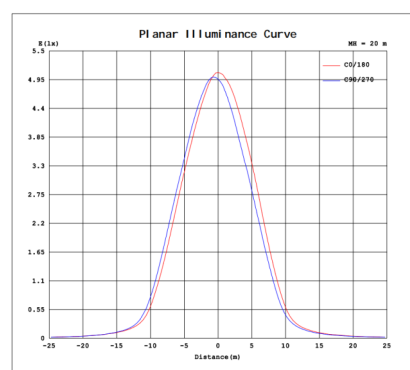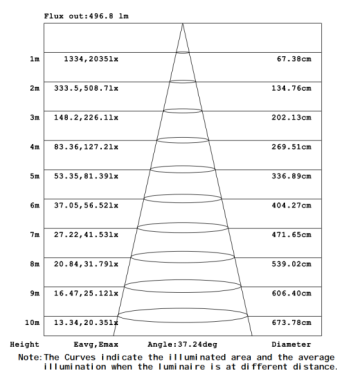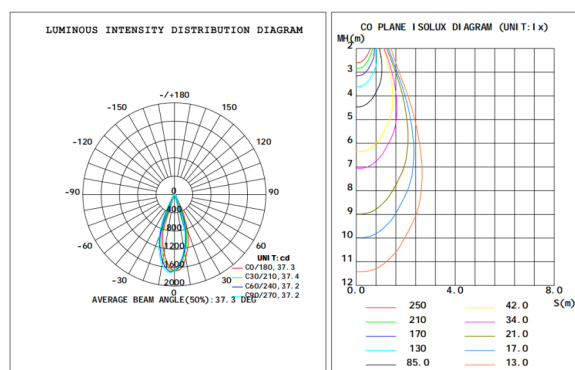

Installation

Fig.1

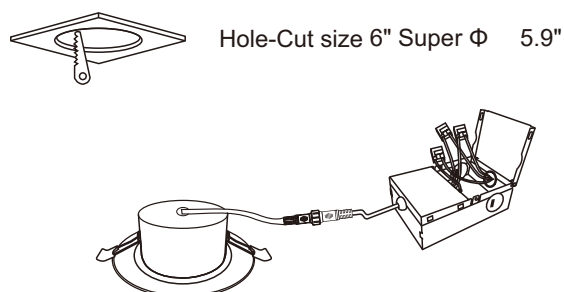


Fig.2




Fig.3

