

Emergency LED Round Panel Light

Key Features

- Emergency modular design (includes a test switch, charge indicator kit & cover)
- Emergency power: 8W for 7 inch
- Emergency time: 90 minutes AC120-277V



7"



ELECTRICAL

VOLTAGE	120-277V AC 50/60 Hz
INPUT RATED CURRENT	120V AC / 0.13A
POWER FACTOR	≥0.9
DIMMABLE	0-100% TRIAC DIMMING
SURGE PROTECTION	0.5KV


MOUNTING



PERFORMANCE

WARRANTY	5 YEAR
CERTIFICATIONS	FCC、ETL、T24
RATE LIFE	>50,000 HOURS
OPERATING TEMPERATURE	-10°C TO + 45°C
CCT	5XCCT 3000K
SDCM	≤ 7steps
CRI	RA90
R9	≥0
BEAM ANGLE	120°
Environment	Damp Location
FIRE RATING	NO
HOUSING PC	WHITE PC (RAL9003)

DIMENSION

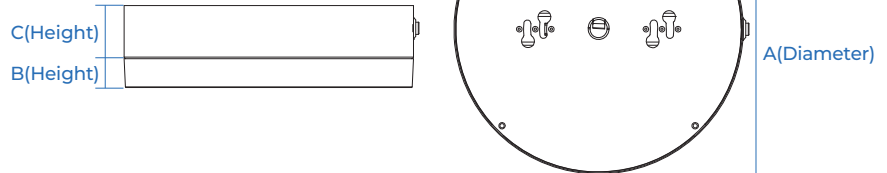

DIMENSION	A (Diameter)	B (Height)	C (Height)
7"	7.08"	2.01"	1.30"

MODEL NO	SIZE inches	WATTAGE	EFFICIENCY lm/w	DELIVERED LUMENS	CCT
E2-P617-K128-N277B5T-W1-E	7"	12W	75LM/W±5%	900LM±5%	3000K

RECOMMENDED DIMMERS

LUTRON				LEVITON	
DVCL-153P-WH	DVELV-300P-WH	S-600P-WH	MACL-153M-WH	6674	6615-POW
DVSCCL-153P-ES	PD-6WCL, Caseta Wireless dimmer	SELV-300P-IV	DVWCL-153PH-WH	6633	RHCL453PW
DVCL-253P-WH	CTCL-153P-IV	AYCL-253P-WH		TSLO6-1LW	