


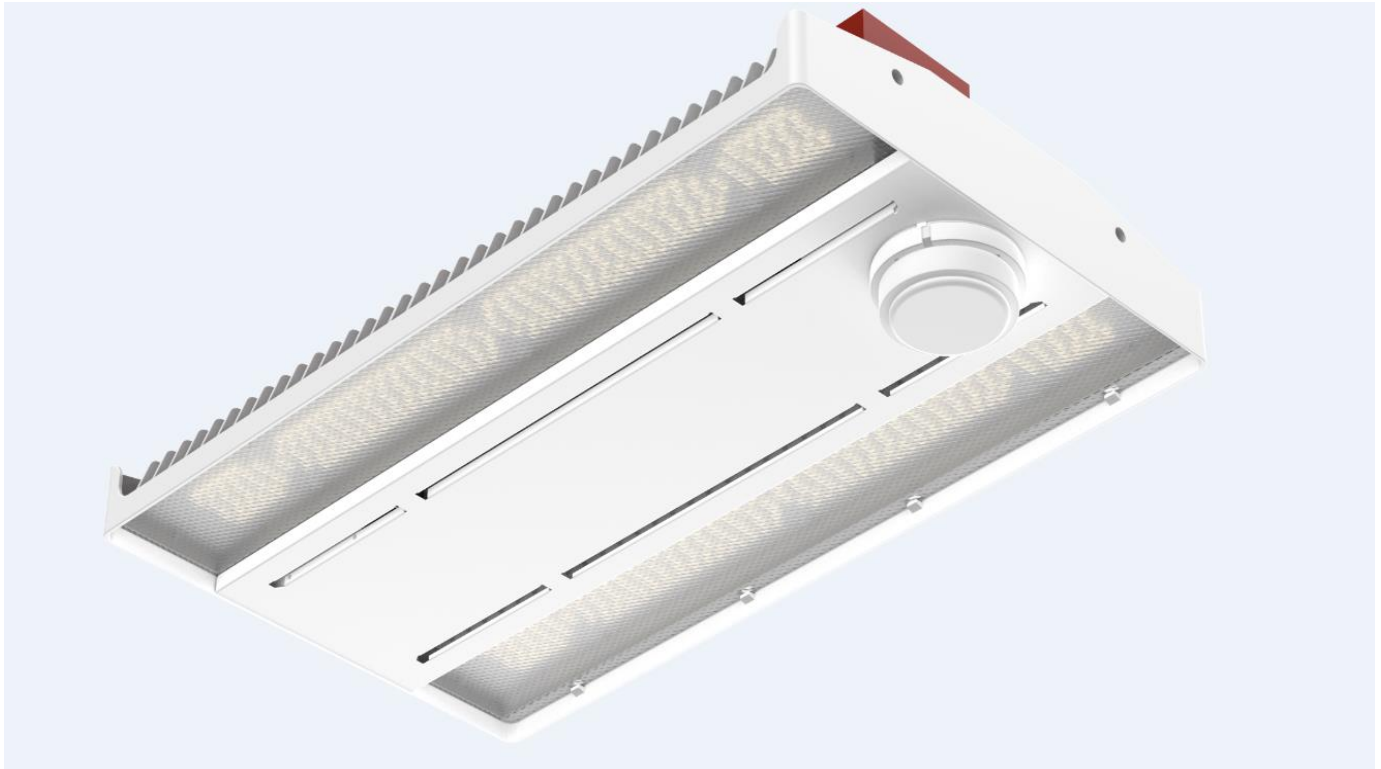

- ***Compact form (40-60% smaller than traditional models)***
- ***Smooth and compact lamp integration***
- ***Simple high lumen efficiency***
- ***The lens can be replaced on site by removing a screw***
- ***Lumen and CCT Selectable***
- ***120-277V Input (347-480V Optional) / Power Selectable***
- ***15'*7.8'*1.7 ' and 18'*11'*1.7 ' sizes, can be joined or connected***
- ***DLC 5.1 Premium***
- ***Optional motion sensor***
- ***High-density packaging for logistics cost optimization***

PRODUCT DESCRIPTION

The E2 linear high bay is built from the ground up for maximum performance and versatility. Deployable in damp locations and temperatures ranging from -40°C to 50°C, this precisely constructed fixture is ideal for virtually all indoor commercial applications.

FEATURES

- Clean, modern, compact design. Precision-designed optics
- Die-cast aluminum housing and heat sink
- Best in class thermal management
- 120-277V universal input (120-347 & 347-480V optional)
- 0-10V dimming comes standard
- Power select technology: 3-step wattage selectable/optional single-power products
- CCT selectable/optional single-color temperature products
- Can be interconnected/joined
- 90° distribution comes standard (60° ,90° optional)
- Standalone PNP sensor available, sensor receptacle pre-installed
- Emergency battery backup options available, sold separately
- 50,000-hour L70 lumen maintenance, meets DLC 5.1
- Ambient operating range: -40°C to +50°C (-24°F to +122°F)
- Mercury and UV free. RoHS compliance
- UL listed for damp locations ; FCC Part 15B, Class A
- 5 year warranty


SUITABLE APPLICATIONS

Warehouse/ Gym / Manufacturing / Retail /
Distribution Centers / Hangars


ORDERING GUIDE

Type	Model	CCT (K)	Voltage (V)	Weight (lb)	Lumen (LM)	Power (W)	LPW (lm/W)	Beam Angel	PF	CRI Ra
Power & CCT Selectable	E2130T3_802CCTW01	2CCT:4000/5000	120~277/120~347/347~480	3.31	12000-15000-18000	80-100-120	150	60° / 90° /120°	≥0.9	≥80
	E2165T3_802CCTW01	2CCT:4000/5000	120~277/120~347/347~480	3.31	15000-18000-23250	100-120-155	150	60° / 90° /120°	≥0.9	≥80
	E2215T3_802CCTW01	2CCT:4000/5000	120~277/120~347/347~480	5.95	18000-23250-30000	120-155-200	150	60° / 90° /120°	≥0.9	≥80
	E2260T3_802CCTW01	2CCT:4000/5000	120~277/120~347/347~480	5.95	23250-30000-36000	155-200-240	150	60° / 90° /120°	≥0.9	≥80
	E2320T3_802CCTW01	2CCT:4000/5000	120~277/120~347/347~480	7.05	30000-36000-45000	200-240-300	150	60° / 90° /120°	≥0.9	≥80
	E2500T3_802CCTW01	2CCT:4000/5000	120~277/120~347	12.34	46500-60000-72000	310-400-480	150	60° / 90° /120°	≥0.9	≥80
Single Power & CCT	E2130W_8040W01	3000/3500/4000/5000	120~277/120~347/347~480	3.09	18000	120	150	60° / 90° /120°	≥0.9	≥80
	E2165W_8040W01	3000/3500/4000/5000	120~277/120~347/347~480	3.09	23250	155	150	60° / 90° /120°	≥0.9	≥80
	E2215W_8040W01	3000/3500/4000/5000	120~277/120~347/347~480	5.73	30000	200	150	60° / 90° /120°	≥0.9	≥80
	E2260W_8040W01	3000/3500/4000/5000	120~277/120~347/347~480	5.73	36000	240	150	60° / 90° /120°	≥0.9	≥80
	E2320W_8040W01	3000/3500/4000/5000	120~277/120~347/347~480	6.61	45000	300	150	60° / 90° /120°	≥0.9	≥80
	E2500W_8040W01	3000/3500/4000/5000	120~277/120~347	11.90	72000	480	150	60° / 90° /120°	≥0.9	≥80


Accessories

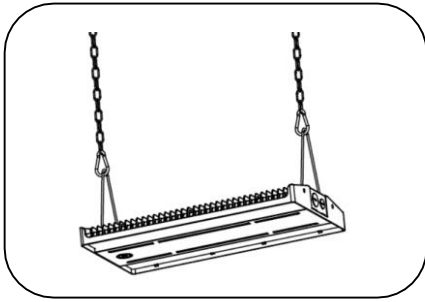


Suspension Mount

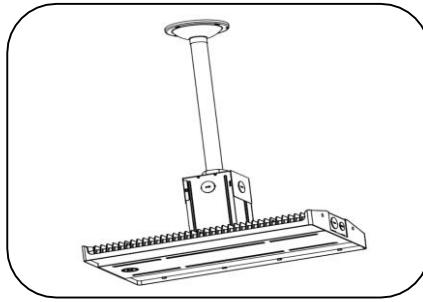

Pendant Mount

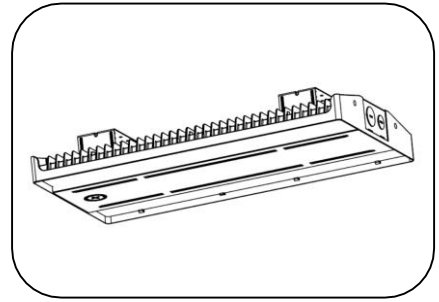

Surface Mount

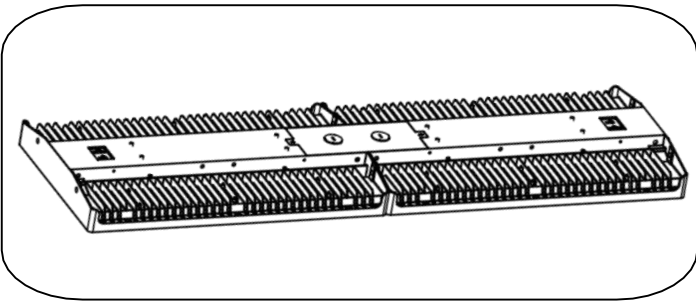

Joinable Mount


- The V-Hook and chain are included as accessories with the lamp
- All other accessories are optional

Sensor optional




- Emergency battery backup options available
- Sensor receptacle pre-installed, plug and play sensor available


Sensor optional

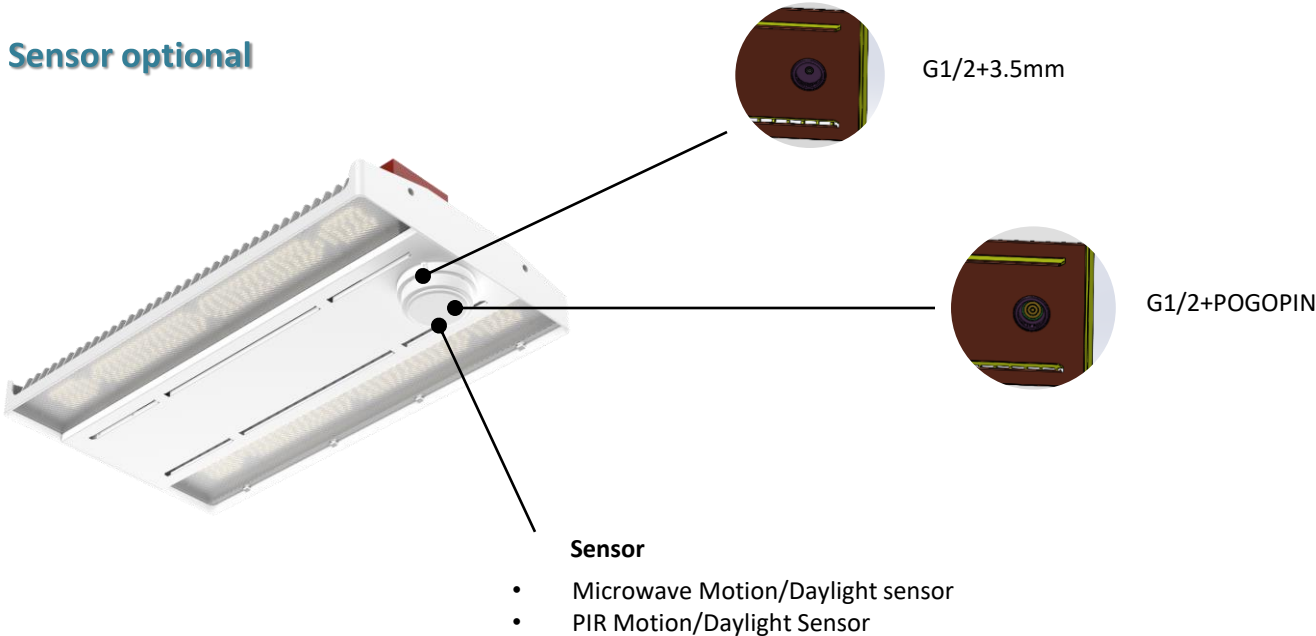


Emergency optional

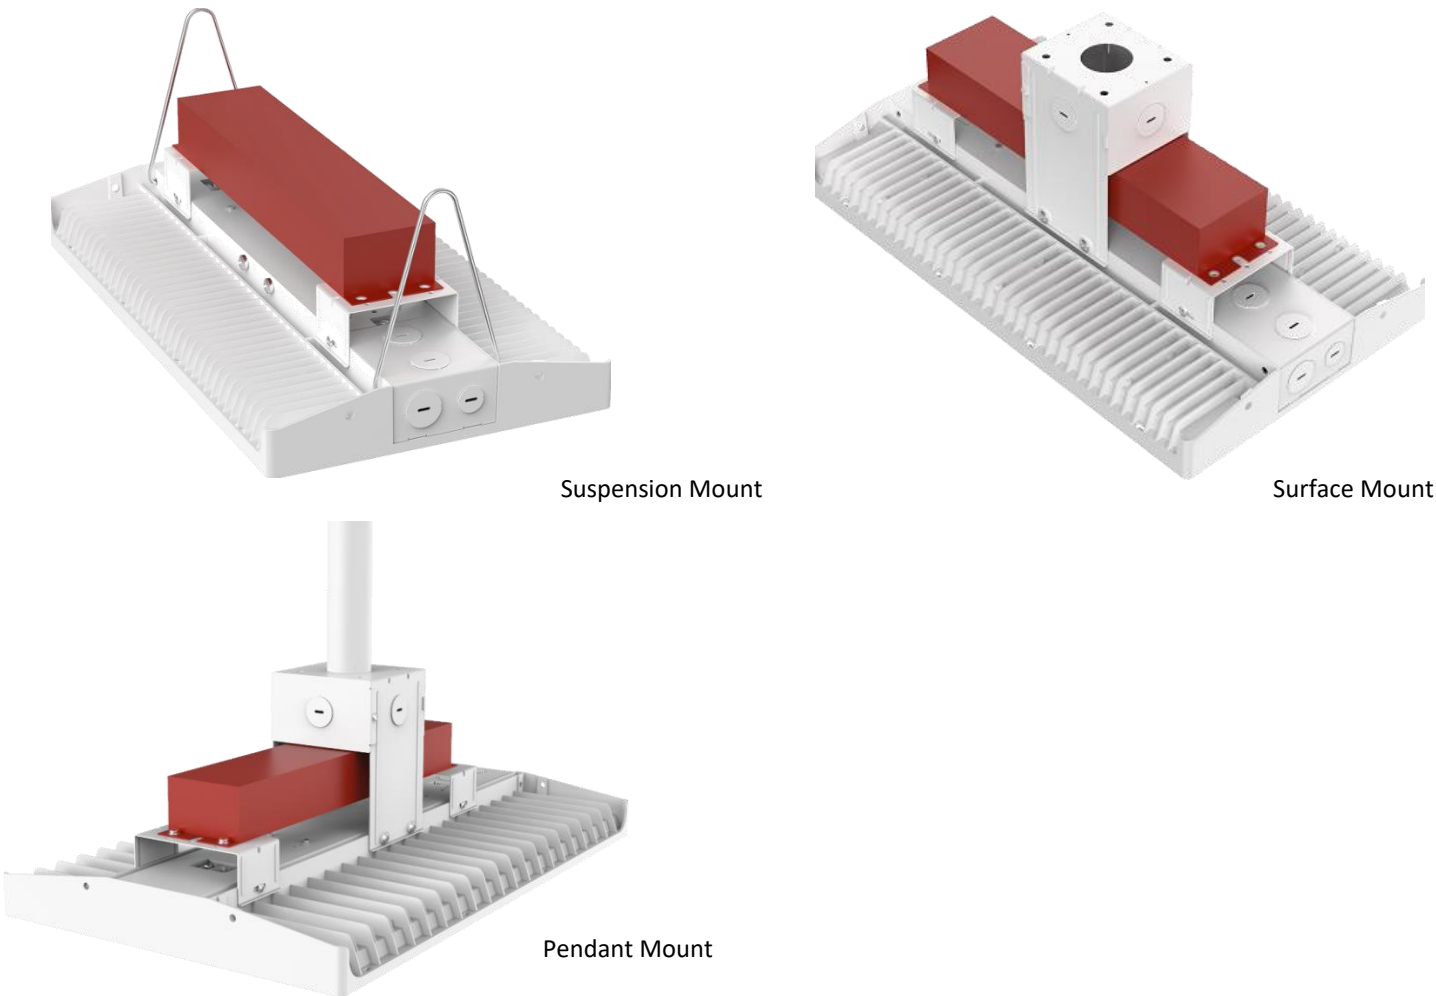


Basic version Dimensions

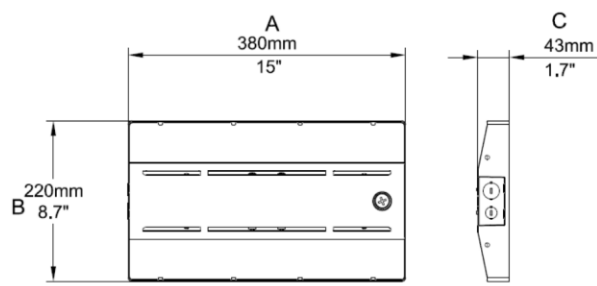


SYMBOL	MIN	TYP	MAX	UNIT
A	47.68	47.76	47.8	inch
B	23.66	23.74	23.8	inch
C	-	1.42	1.5	inch

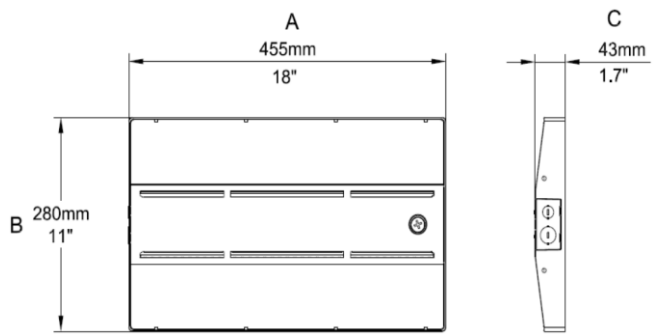

SYMBOL	MIN	TYP	MAX	UNIT
A	47.68	47.76	47.8	inch
B	23.66	23.74	23.8	inch
C	-	1.42	1.5	inch

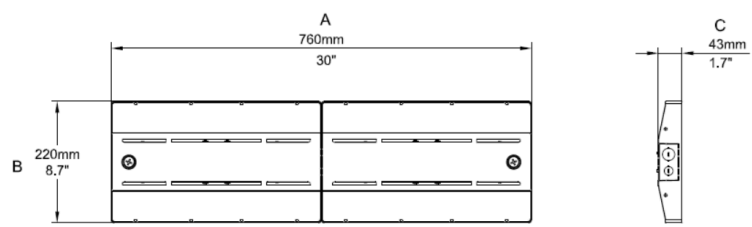

SYMBOL	MIN	TYP	MAX	UNIT
A	47.68	47.76	47.8	inch
B	23.66	23.74	23.8	inch
C	-	1.42	1.5	inch

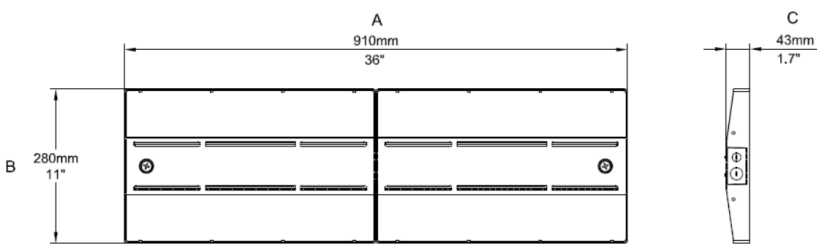

SYMBOL	MIN	TYP	MAX	UNIT
A	47.68	47.76	47.8	inch
B	23.66	23.74	23.8	inch
C	-	1.42	1.5	inch

Model Number	Length (in)	Width(in)	Depth(in)	WEIGHT(ibs)
E2130T3_802CCTW01	15	8.7	1.7	3.31
E2165T3_802CCTW01	15	8.7	1.7	3.31
E2215T3_802CCTW01	18	11	1.7	5.95
E2260T3_802CCTW01	18	11	1.7	5.95
E2320T3_802CCTW01	30	8.7	1.7	7.05
E2500T3_802CCTW01	36	11	1.7	12.34

EM version Dimensions

Model Number	Pack Quantity	Quantity of single trays	Master Carton Size	Number of trays	Container loading quantity(pc/53FT)
E2130T3_802CCTW01	1 pcs	392	1.250*1000*120mm	30 PTU	11760pcs
E2165T3_802CCTW01	1 pcs	392	1.250*1000*120mm	30 PTU	11760pcs
E2215T3_802CCTW01	1 pcs	280	1.250*1000*120mm	30 PTU	8400pcs
E2260T3_802CCTW01	1 pcs	280	1.250*1000*120mm	30 PTU	8400pcs

