



LED SHOE BOX PARKING LIGHT

Model: E2-SB-G4-XXW-50K

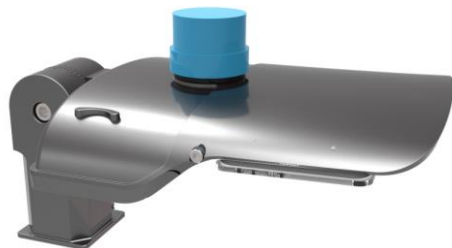

Motion Sensor

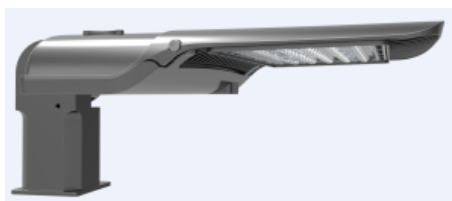

3/5/7 Pin photocell

PRODUCT DESCRIPTION:

The E2 Lighting LED Shoe Box Parking Light is the ideal LED solution for distributing light in parking lots, streets and wall areas. Adjustable installation angles from -90° to $+90^{\circ}$ with an adjustable fitter mount (other mounts available). Uses high-efficiency LM-80 LED chips to produce over 150 lm/W. Standard dark bronze powder finish. ETL classified, ETL listed, DLC* listed and RoHS compliant.

FEATURES:

- Module lens design provides well-suited lighting distribution
- LM-80 LEDs 150 lmw+ Chip, Sosen driver
- Installation angle -90° to $+90^{\circ}$ deg adjustable
- Photocell sensor, motion sensor option available
- ETL and DLC® Standard 5.1*
- L70 lifespan projected to be 100,000 hours
- 5 year limited warranty

APPLICATION:

- Outdoor Pole/Arm-mounted Area and Roadway Luminaires
- Architectural, Industrial, Factory, Gym, Garden, Seaport, etc.




TESTED DATA:

- Technical requirements Version: 5.1*
- Classification: Standard/Premium*
- Light Output: 7200 lm, 12,000 lm, 15,000 lm, 22,500 lm, 30,000 lm, 45,000 lm
- Wattages: 48W, 80W, 100W, 150W, 200W, 300W
- Efficacy: >150 lm/W
- Power Factor: >0.9
- CCT: 3000K, 4000K, 5000K
- THD: $<20\%$
- Frequency: 50-60Hz
- Input Voltage: AC100-277V, 180-480V
- IP Rating: IP65
- Working Environment: -40°F to 122°F
- Beam Angle: Type III, V
- Dimming Compatible: Yes
- Mercury Content: No Hg
- Lens: Polycarbonate
- 3000K - 5000K Models DLC Listed

Product Number	Wattage	Color	Certifications	Dimmable	Voltage	Lumens	L70	Sensor
E2-SB-G4-48W-50K	48W	3000K = 30K 4000K = 40K 5000K = 50K	ETL & DLC®* Standard Premium	Option: Yes	AC100-277V AC180-480V	7200 lm	100,000hrs	P = Photocell MS- Motion sensor
E2-SB-G4-80W-50K	80W					12,000 lm		
E2-SB-G4-100W-50K	100W					15,000 lm		

E2-SB-G4-150W-50K	150W	3000K = 30K 4000K = 40K 5000K = 50K	ETL & DLC®* Standard Premium	Option: Yes	AC100-277V AC180-480V	22,500 lm	100,000hrs	P = Photocell MS- Motion sensor
E2-SB-G4-200W-50K	200W					30,000 lm		
E2-SB-G4-300W-50K	300W					45,000 lm		



Dimensions (mm)

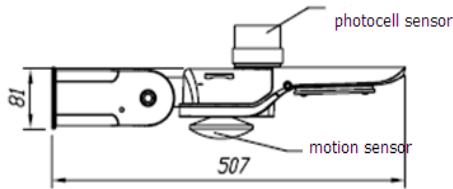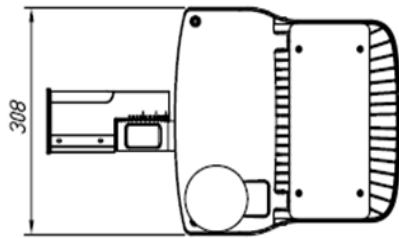

For Models:

E2-SB-G4-48W-50K



E2-SB-G4-80W-50K

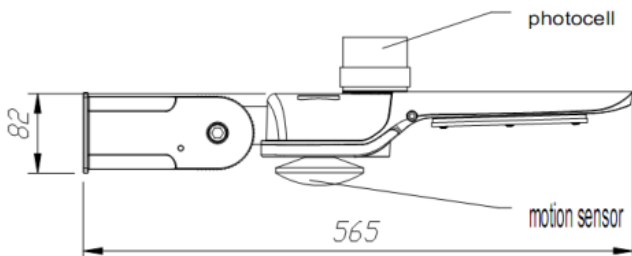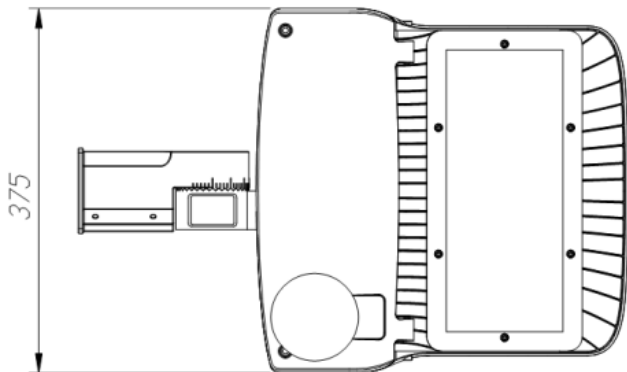

For Models:

E2-SB-G4-100W-50K

E2-SB-G4-150W-50K

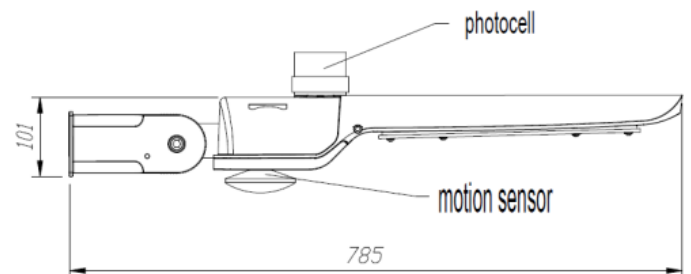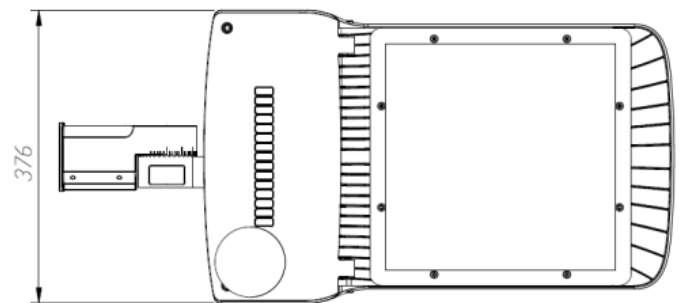


For Models:



E2-SB-G4-200W-50K

E2-SB-G4-300W-50K


Dimension (Suitable for 2 3/8"/60mm diameter)

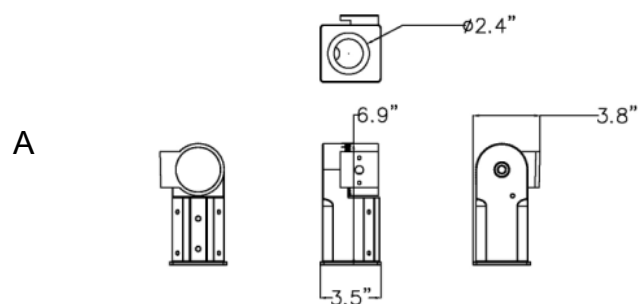


Slip Fitter

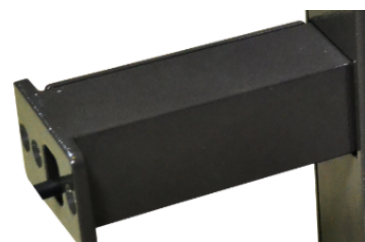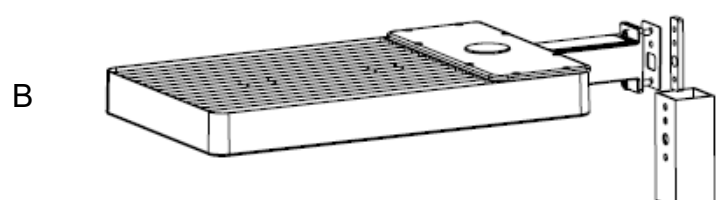


Square Pole

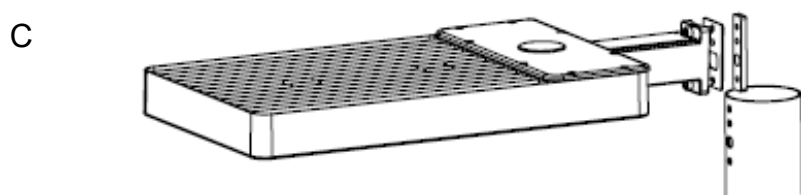

Round Pole

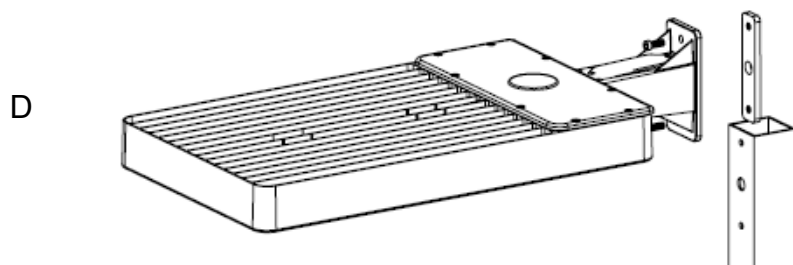

Square Pole

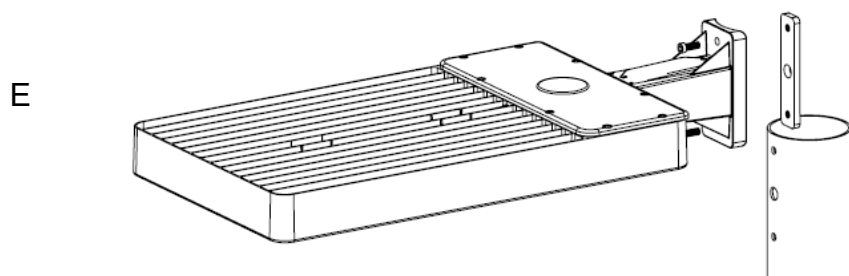

Round Pole

Dimension (Suitable for 3"/76mm diameter)

