

Full Cutoff Wall Pack

E2-WPF-R10-30/40/60/80W-30/40/50K





Product Description

Light up your outdoor area with the E2 LED Full Cutoff Wall Pack. It is a highly efficient lighting solution that provides a long-lasting and energy-saving solution. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

Features

1. ETL/cETL/DLC Premium Certificates.
2. Easy Installation.
3. IP65 Wet Location Rated.
4. Durable Die-cast Aluminum Housing.
5. Photocell and Motion Sensor Options.
6. UV-resistant Polycarbonate Refractor Lens.
7. Emergency Power Options: 4W & 8W.
8. EBBU Operating Time: 1.5 Hours.
9. Type II / Type III / Type IV Distribution Optics Standard.

Physical Dimensions

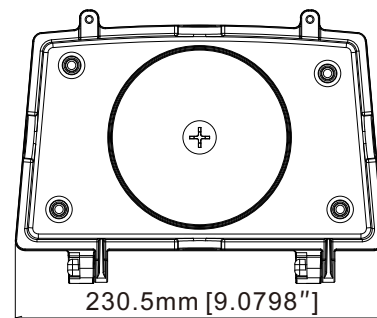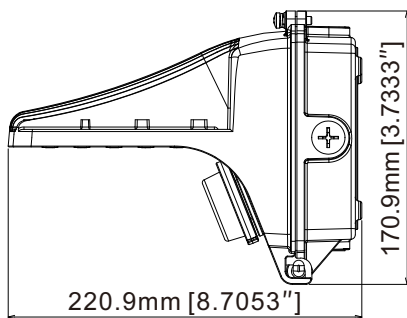

30-60W (120-277VAC & 120-347VAC) / 80W (120-277VAC)

Specifications

Model No.	E2-WPF-R10-30/40/60/80W-30/40/50K			
Input Power	30W	40W	60W	80W
Lumen	3900lm	5200lm	7800lm	10400lm
Efficacy	130LM/W(±5%)			
Input Voltage	120-277VAC /120-347VAC			
Color Temperature	3000K Less 2% Blue Light CCT			
THD	< 20%			
Surge Protection	L-N: 2KV L-N: 4KV			
LED Type	3030			
Viewing Angle	Type II / Type III / Type IV			
Operating Temperature	-22°F to 113°F (-30°C to +45°C)			
Operating Humidity	RH<90%			
Storage Temperature	-40°F to 158°F (-40°C to +70°C)			
Storage Humidity	RH<95%			
IP Rating	IP 65			
Power Factor	≥0.90			
Frequency	50/60Hz			
Certification	c ETL / ETL / DLC Premium			
Housing	Die-cast Aluminum			
Finish	Black / Bronze / Customized (Optional)			
Driver Brand	Weled Power			
Additional Functions	0-10V / 1-10V / Photocell/Microwave Motion Sensor /Power Adjustable			
Lifetime	L70 @ 54,000Hrs			
Warranty	5 Years			

Applications

Outdoor wall-mount applications: building facades, commercial, industrial, retail, hospitality, buildings that demand long service life and low maintenance.

