

# E2-WPF-WP10-40W-30/40/50K-M-P **FULL CUT-OFF WALL PACK with 2-in-1 Motion Sensor / Photocell & CCT Tunable**


**NEW**

Good heat dissipation, light weight,  
cost-effective and low transportation cost.



UV-resistant  
polycarbonate  
refractor lens.

Plug & Play sensor with microwave and  
daylight harvesting function, 2-in-1 sensor.

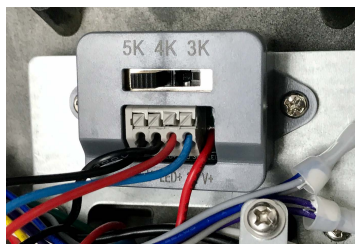

## PRODUCT DESCRIPTION:

E2 LIGHTING'S Full Cut-Off Wall Pack is a highly efficient, multi-function fixture that provides a long-lasting and energy saving lighting solution. This fixture comes equipped with a plug & play 2-in-1 microwave motion sensor and daylight harvesting photocell function; programmable with an optional remote. Internal CCT color temperature tunable switch. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

## FEATURES AND STANDARDS:

- ETL/cETL/DLC Premium Certificate.
- Easy Installation.
- IP65 Wet Location Rated.
- Durable Die-cast Aluminum Housing.
- Photocell and Motion Sensor Options.
- UV-resistant Polycarbonate Refractor Lens.
- Type III Distribution Optics Standard/Other Optics Available by Request.

## APPLICATIONS:

Outdoor Wall-mount Applications: Building facade, commercial, industrial, retail, hospitality buildings that demand long service life and low maintenance.

## TESTED DATA:

- Input Power - 40W
- Lumen - 5200lm
- Efficacy - 130lm/W ( $\pm 10\%$ )
- Input Voltage - 120-347VAC
- Color Temperature - 3000K-4000K-5000K
- THD -  $<20\%$
- Dimmable - 0-10V
- LED Brand - Lumileds
- LED Type - 3030
- LED QTY - 48 pcs
- Viewing Angle - Type III
- Operating Temperature - 86°F to 113°F (-30°C to +45°C)
- Operating Humidity - RH $<90\%$
- Color Rendering Index - Ra $>70$
- IP Rating - IP65
- Certification - cETL/ETL/DLC Premium
- Housing - Die-cast Aluminum
- Life Time -  $>50,000$ Hrs
- Warranty - 5 Years



3CCT Tunable



5000K

4000K


3000K



# E2-WPF-WP10-40W-30/40/50K-M-P FULL CUT-OFF WALL PACK

| Product Number                | Wattage | Color     | Certifications    | Dimmable | Voltage    | Lumens  | Working Hours | CRI   |
|-------------------------------|---------|-----------|-------------------|----------|------------|---------|---------------|-------|
| E2-WPF-WP10-40W-30/40/50K-M-P | 40W     | 30/40/50K | UL & DLC® Premium | 0-10V    | AC100-277V | 5200 lm | 50,000hrs     | Ra>70 |

## DIMENSIONS:

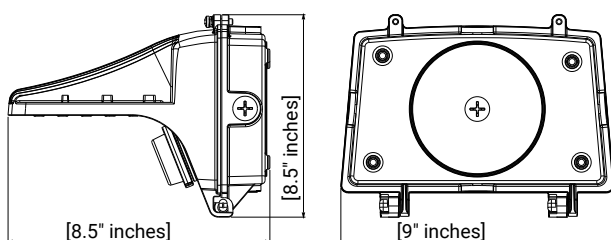

30-40W

## Optional Remote

