

Mini Wall Pack Series

E2-WPM Mini Wall Pack Series 17W & 25W



Product Description



Cast in a traditional design, this LED wall mount luminaire offers the shape you've grown accustomed to, coupled with the high-powered and energy efficient LEDs you want. Photocell for dusk to dawn operation. It is ideal for safety, security and any outdoor facilities.

Features

- Universal 120-277 VAC Input Voltage.
- Driver Power Factor >90%, THD <20%, Lifespan 50,000 hours.
- Estimated 100,000 Hour LED Lifespan Based on IES LM-80 Results and TM-21 Calculations
- Warranty: 5 Year Warranty

Dimensions

Unit: mm/Inch



Accessories

	Photocell No. PC-JL-120-277V USE: Photocell is field installed or pre-installed in factory by request
--	--

Specifications

Construction:

- Tempered UV coated lens provide outstanding performance, uniformity and glare control.
- Optional clear lens or frosted lens as per applications.

Optics:

- Scalable Lumen Packages from 1,800 to 2,600 Lumens.
- Light engines are available in standard 3000K/4000 K and 5000 K (70 CRI) configurations.
- Suitable for operation in -40°C to 40°C ambient environments.

Performance Data

System Wattage	Voltage	Lens	CRI	Lumens (3000K)	LPW (3000K)	Lumens (4000K)	LPW (4000K)	Lumens (5000K)	LPW (5000K)
17W	120-277VAC	Clear Lens	70	1800lm	106 lm/W	1900lm	112 lm/W	1950lm	115 lm/W
25W	120-277VAC	Clear Lens	70	2500lm	100 lm/W	2550lm	102 lm/W	2600lm	104 lm/W

Electrical Data


Number Of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	250	17	120	0.14
		17	208	0.08
		17	240	0.07
		17	277	0.06
1	250	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09

DLC Model No.

System Wattage	Voltage	CCT	Lens	DIC NO.	DLC Classification
17W	120-277V	3000K	Clear Lens	WM17W27V30K[D,B,W][Blank,P0]	Standard
		3500K	Clear Lens	WM17W27V35K[D,B,W][Blank,P0]	Standard
		4000K	Clear Lens	WM17W27V40K[D,B,W][Blank,P0]	Standard
		5000K	Clear Lens	WM17W27V50K[D,B,W][Blank,P0]	Standard
25W	120-277V	3000K	Clear Lens	WM25W27V30K[D,B,W][Blank,P0]	Standard
		3500K	Clear Lens	WM25W27V35K[D,B,W][Blank,P0]	Standard
		4000K	Clear Lens	WM25W27V40K[D,B,W][Blank,P0]	Standard
		5000K	Clear Lens	WM25W27V50K[D,B,W][Blank,P0]	Standard

Photometry

Clear Lens

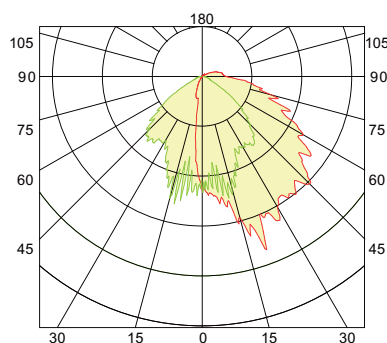

Frosted Lens

