

Oval LED Emergency Wall Pack Light

Date:..... Location:

Product:..... Project:.....

Quantity:..... Catalog#



FEATURES

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- UL-94V-0 flame rating, fire-resistant
- IP65 protection
- Power consumption: 5W max
- Output: Super bright COB LED 15W 1870lm
- for general mode
- 600lm for emergency mode
- 4.8V 1800mAh Nickel Cadmium battery
- Backup time: ≥90minutes
- Charging time: 24 hours
- Overcharge & Over-discharge protection
- Conversion time: <0.2second
- Operating temperature: -10°C~40°C
- Dimension: 10.4"x6.5"

PERFORMANCE

Model NO	Emergency Duration	Wattage	Voltage/CurrentInput		Lumen Efficiency	Kelvin Options
			120V	277V		
E2-WPM-15W-35/40/50K-E-BK	90 minutes	15W	0.14A	0.05A	120lm/W	3500/4000/5000K

Special Functions

1. When the power supply system is out of power, the lamps start the emergency system to turn on the lights for up to 90 minutes.
2. The lamp has a light-sensing function; when < 3FC lamps are automatically turned on, > 3FC lamps are automatically turned off

Electric Characteristic

Model NO	Input voltage	Color Temperature	Efficiency	Power		CRI	Light Efficiency	Working temperature	Certificate
				Input power	EBU power				
E2-WPM-15W-35/40/50K-E-BK	120-277V/AC	35K/40K/50K	120lm/W	15W	5W	>72	D	-10°C+40°C	UL

PRODUCT ORDERING GUIDE

E2

WP06

15W

1

2

3

E2

-

WP06


15W

☒ E2 E2 Lighting

☒ EW Emergency Wall Pack


☒ 15W Power 15W

DIMENSION

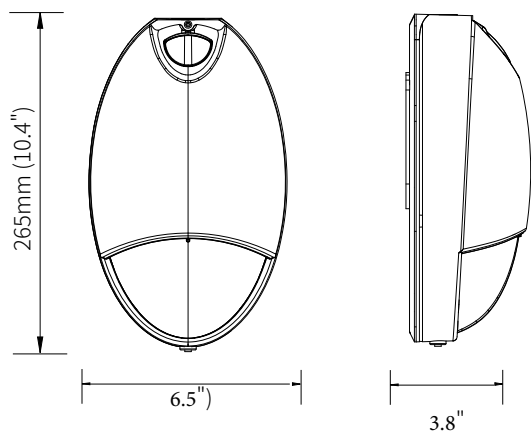

DIMENSION

E2 EW15W Input Power

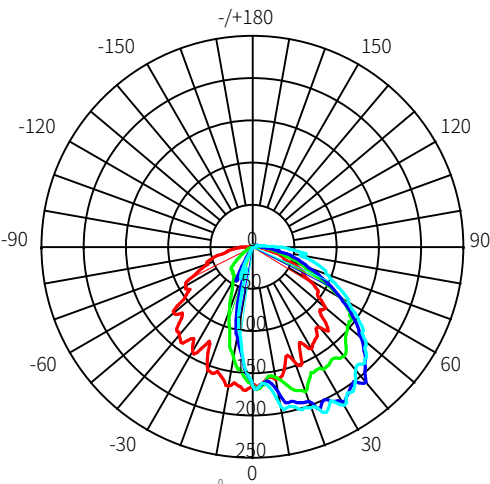


AVERAGE BEAM ANGLE(50%): 86.4°

UNIT:CD
Test Number:E2W15W
Lumens:1200LM
Test Number:12W
Test Number:5000K

— C0/180,120.1
— C30/210,120.9
— C60/240,111.3
— C90/270,131.4

E2 EW 15W Empower

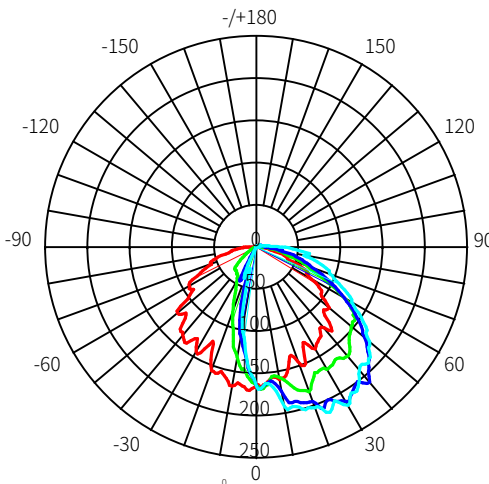

AVERAGE BEAM ANGLE(50%): 86.4°

UNIT:CD
Test Number:E2W15W
Lumens:400LM
Test Number:4W
Test Number:5000K

— C0/180,120.1
— C30/210,120.9
— C60/240,111.3
— C90/270,131.4