

E2-LHB02-4-165-220-320W-35/40/50K

NEW LED LINEAR HIGH BAY LIGHT- LHB02 SERIES

E2 Lighting new linear high bay light is ideal for indoor lighting, warehouse, super market, gymnasiums, production assembly areas. Replace existing HID high bay light. Solid state lighting technology for long life, low maintenance and high efficiency.



### PRODUCT BENEFITS

- ▶ Private design
- ▶ UL/cUL, DLC 5.1 Premium Listed
- ▶ 120-277VAC available
- ▶ High Efficacy to 135LM/W Great
- ▶ Great Features
- ▶ Easy Installation
- ▶ Lifespan: >50,000Hrs Warranty
- ▶ 5 years



### PRODUCT SPECIFICATION

Nomenclature	LHB02-1F60Z	LHB02-1F80Z	LHB02-1F110Z	LHB02-2F80Z	LHB02-2F110Z	LHB02-2F165Z	LHB02-2F220Z
Wattage	60W	80W	110W	80W	110W	165W	220W
Lumens	8100LM	10800LM	14850LM	10800LM	14850LM	22275LM	29700LM

Nomenclature	LHB02-3F220Z	LHB02-3F320Z	LHB02-4F220Z	LHB02-4F320Z
Wattage	220W	320W	220W	320W
Lumens	29700LM	43200LM	29700LM	43200LM

LHB02-AABBZ-X-YY-A, AA denote product size; BB denote wattage; Z denote voltage; X denote additional function; YY denote color temperature or 3CCT; A denote blank or aux output.

Efficacy	135LM/W (±5%)	Housing	SPCC
Input voltage	[L]120-277VAC/[M]120-347VAC	CRI	Ra>80
CCT	3500K/4000K/5000K	Operating Temperature	-22°F to 104°F (-30°C to +40°C)
THD	<20%	Finish	White
LED Type	2835	Additional function	[D]0-10V dimmable, [C]3 CCT/[S] Watts Selectable, Emergency driver, [M] Microwave Motion Sensor
IP Rating	IP20	Life Time	> 50,000Hrs
Power Factor	>0.9	Warranty	5 Years
Certificates	UL/cUL, DLC 5.1 Premium	UGR	<28
Frequency	50/60Hz		
Beam Angle	90°		

### ADDITION ACCESSORIES



Microwave or PIR Smart controller




25W / 40W Emergency driver




Wire guard

## MOUNTINGS




Ceiling with hook

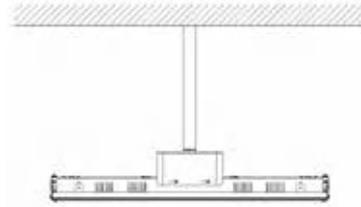


3/4" Pipe

## PRODUCT DIMENSION

3FT : 220W/320W

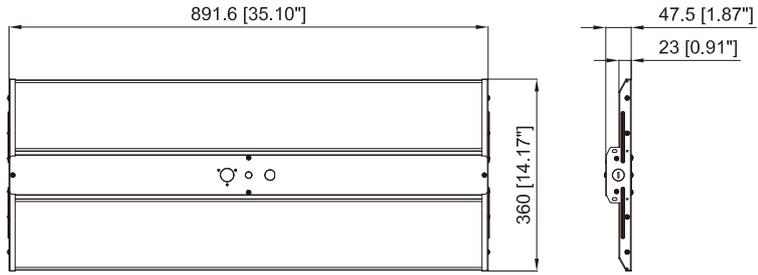

4FT: 165W/220W/320W

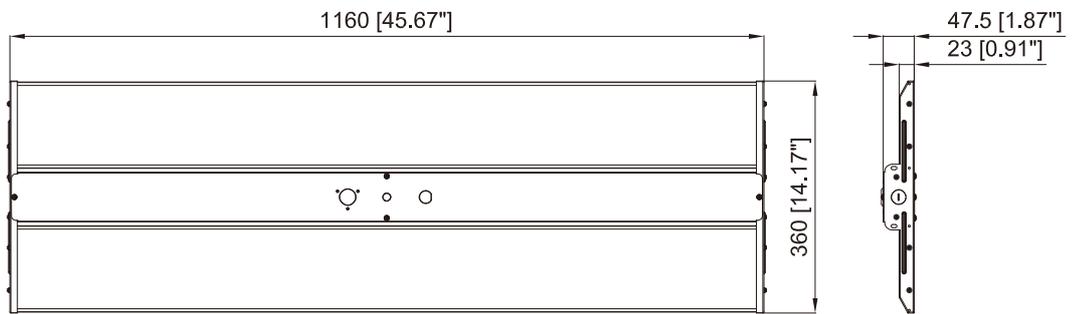

PACKING INFO

Model No.	Product Weight(KG)	Package Weight(KG)		Carton Size(MM)	PCS/CTN	20GP (PCS)	40HQ (PCS)
	N. W/PC	N. W/CTN	G. W/CTN				
LHB02-1F60W	1.63	6.51	8.89	410*345*345mm	4	2112	5136
LHB02-1F80W	1.66	6.65	9.02				
LHB02-1F110W	1.74	6.98	9.35				
LHB02-2F80W	2.34	9.34	12.11	650*345*345mm	4	1344	3268
LHB02-2F110W	2.42	9.67	12.44				
LHB02-2F165W	2.52	10.09	12.85				
LHB02-2F220W	3	12	14.76	650*345*405mm	4	1148	2796
LHB02-3F220W	3.9	7.8	10.11	940*180*405mm	2	746	1814
LHB02-3F320W	4.1	8.2	10.51				
LHB02-4F220W	4.5	9	11.51	1210*180*405mm	2	582	1412
LHB02-4F320W	4.7	9.4	11.91				