

Thim LED Round Panel Light

5CCT Selectable



Key Features

- Ultra Slim Design, Edge lit low-profile, All PC housing body
- 2700K/3000K/3500K/4000K/5000K Selectable
- Easy Installation by twist-and-lock brackets

5" | 7" | 9" | 12" | 16" | 19" | 24"



ELECTRICAL


VOLTAGE	AC120-277V AC 50/60HZ
POWER FACTOR	≥0.9
DIMMABLE	TRIAC DIMMING
SURGE PROTECTION	0.5KV

PERFORMANCE

WARRANTY	5 YEAR
CERTIFICATIONS	T24, ETL, FCC
RATE LIFE	>50,000 HOURS
OPERATING TEMPERATURE	-10°C TO + 45°C
CCT	2700K/3000K/3500K/4000K/5000K
SDCM	≤ 5
CRI	RA90
R9	> 0
BEAM ANGLE	120°
Environment	Damp Location
FIRE RATING	V0
HOUSING PC	WHITE PC (RAL9003)


ENERGY CHART					
MODEL NO	SIZE inches	WATTAGE	EFFICIENCY lm/w	DELIVERED LUMENS	CCT
E2-DL-P615-11W	5"	11W	72LM/W±5%	792LM±5%	2700K 3000K 3500K 4000K 5000K
E2-DL-P617-12W	7"	12W	75LM/W±5%	900LM±5%	
E2-DL-P619-18W	9"	18W	82LM/W±5%	1476LM±5%	
E2-DL-P6112-24W	12"	24W	88LM/W±5%	2112LM±5%	
E2-DL-P6116-30W	16"	30W	94LM/W±5%	2820LM±5%	
E2-DL-P6119-36W	19"	36W	94LM/W±5%	3384LM±5%	
E2-DL-P6124-45W	24"	45W	94LM/W±5%	4230LM±5%	

DIMENSION

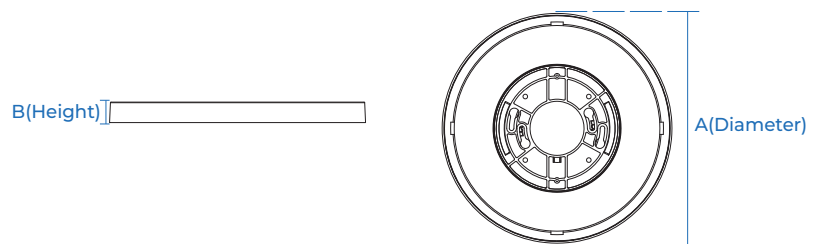

DIMENSION	A (Diameter)	B (Height)
5"	135mm	18mm
7"	180mm	18mm
9"	225mm	18mm
12"	300mm	18mm
16"	400mm	18mm
19"	480mm	25mm
24"	600mm	25mm

MOUNTING




Only for 5" Twist Bracket



twist-and-lock brackets

RECOMMENDED DIMMERS

LUTRON			LEVITON	
DVCL-153P-WH	DVELV-300P-WH	S-600P-WH	6674	6615-POW
DVSCCL-153P-ES	PD-6WCL, Caseta Wireless dimmer	SELV-300P-IV	6633	RHCL453PW
DVCL-253P-WH	CTCL-153P-IV	AYCL-253P-WH	TSLO6-1LW	

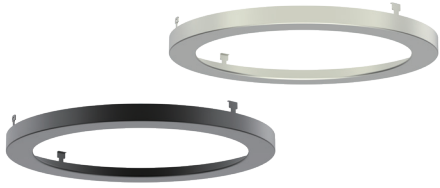

Matte Black Satin Nickel

C25 Suitable for XSlim

- Φ5.38"*0.56"H.
- Φ7.15"*0.56"H.
- Φ8.94"*0.56"H.
- Φ11.87"*0.56"H.
- Φ15.02"*0.56"H.



Black & Gold White & Gold

C26 Suitable for XSlim Thim

- Φ5.38"*1.2"H.
- Φ7.15"*1.2"H.
- Φ8.94"*1.2"H.
- Φ11.87"*1.2"H.
- Φ15.02"*1.2"H.



Black & Gold White & Gold

C27 Suitable for XSlim/XRim/Thim

- Φ12.6"*3.8"H.
- Φ15.35"*3.8"H.



Black White

C32 Suitable for XSlim Thim

- Φ5.47"*6"H.
- Φ7.24"*6"H.
- Φ9.02"*7"H.



Black White

C28 Suitable for XSlim Thim

- Φ5.38"*3.5"H.
- Φ7.15"*3.5"H.



Black White

C29 Suitable for XSlim Thim

- Φ5.38"*2"H.
- Φ7.15"*2"H.



White/Black

P21 Suitable for XSlim/XRim/Thim

- Ceiling Cup:Φ4.92"*0.9"H.
- Base:Φ4.5"*3.2"H.



P22 Suitable for XSlim Thim

- Φ5.38"*3.5"H.
- Φ7.15"*3.5"H.

White/Black



Black

P23 Suitable for XSlim/XRim

- Φ15.75"*6.61"dp.*120"H.(Max)
- Φ19.1"*7.8"dp.*120"H.(Max)
- Φ22.32"*8.86"dp.*120"H.(Max)



Black

P24 Suitable for XSlim/XRim/Thim

- Φ14.69"*6.61"dp.*120"H.(Max)
- Φ17.83"*7.8"dp.*120"H.(Max)
- Φ20.82"*8.86"dp.*120"H.(Max)