

Thin LED Round Panel Light

5CCT Selectable

Key Features

- Ultra Slim Design, Edge Lit, Low-profile, All PC Housing
- CCT Selectable 2700K/3000K/3500K/4000K/5000K
- Easy Installation via Twist-and-lock Brackets



5" | 7" | 9" | 12" | 16" | 19" | 24"



ELECTRICAL


VOLTAGE	AC120-277V AC 50/60HZ
POWER FACTOR	≥0.9
DIMMABLE	TRIAC DIMMING
SURGE PROTECTION	0.5KV

PERFORMANCE

WARRANTY	5 YEARS
CERTIFICATIONS	T24, ETL, FCC
RATE LIFE	>50,000 HOURS
OPERATING TEMPERATURE	-10°C TO + 45°C
CCT	2700K/3000K/3500K/4000K/5000K
SDCM	≤ 5
CRI	RA90
R9	> 0
BEAM ANGLE	120°
Environment	Damp Location
FIRE RATING	V0
HOUSING PC	WHITE PC (RAL9003)


ENERGY CHART					
MODEL NO	SIZE inches	WATTAGE	EFFICIENCY lm/w	DELIVERED LUMENS	CCT
E2-DL-P615-11W	5"	11W	72LM/W±5%	792LM±5%	2700K 3000K 3500K 4000K 5000K
E2-DL-P617-12W	7"	12W	75LM/W±5%	900LM±5%	
E2-DL-P619-18W	9"	18W	82LM/W±5%	1476LM±5%	
E2-DL-P6112-24W	12"	24W	88LM/W±5%	2112LM±5%	
E2-DL-P6116-30W	16"	30W	94LM/W±5%	2820LM±5%	
E2-DL-P6119-36W	19"	36W	94LM/W±5%	3384LM±5%	
E2-DL-P6124-45W	24"	45W	94LM/W±5%	4230LM±5%	

DIMENSIONS

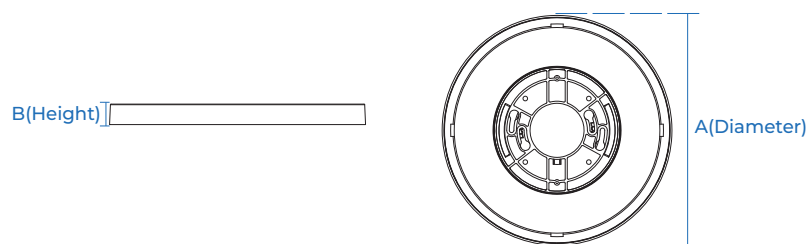

DIMENSION	A (Diameter)	B (Height)
5"	135mm	18mm
7"	180mm	18mm
9"	225mm	18mm
12"	300mm	18mm
16"	400mm	18mm
19"	480mm	25mm
24"	600mm	25mm

MOUNTING



Only for 5" Twist Bracket



Twist-and-lock Brackets

RECOMMENDED DIMMERS

LUTRON				LEVITON	
DVCL-153P-WH	DVELV-300P-WH	S-600P-WH	MACL-153M-WH	6674	6615-POW
DVSCCL-153P-ES	PD-6WCL, Caseta Wireless dimmer	SELV-300P-IV	DVWCL-153PH-WH	6633	RHCL453PW
DVCL-253P-WH	CTCL-153P-IV	AYCL-253P-WH		TSLO6-1LW	



Matte Black

Satin Nickel

C25 Suitable for

XSlim

Φ5.38"*0.56"H.
Φ7.15"*0.56"H.
Φ8.94"*0.56"H.
Φ11.87"*0.56"H.
Φ15.02"*0.56"H.



Black & Gold

White & Gold

C26 Suitable for

**XSlim
Thin**

Φ5.38"*1.2"H.
Φ7.15"*1.2"H.
Φ8.94"*1.2"H.
Φ11.87"*1.2"H.
Φ15.02"*1.2"H.



Black & Gold

White & Gold

C27 Suitable for

XSlim/XRim/Thin

Φ12.6"*3.8"H.
Φ15.35"*3.8"H.



Black

White

C32 Suitable for

**XSlim
Thin**

Φ5.47"*6"H.
Φ7.24"*6"H.
Φ9.02"*7"H.



Black

White

C28 Suitable for

**XSlim
Thin**

Φ5.38"*3.5"H.
Φ7.15"*3.5"H.



Black

White

C29 Suitable for

**XSlim
Thin**

Φ5.38"*2"H.
Φ7.15"*2"H.



White/Black

P21 Suitable for

XSlim/XRim/Thin

Ceiling Cup:Φ4.92"*0.9"H.
Base:Φ4.5"*3.2"H.

P22 Suitable for

**XSlim
Thin**

Φ5.38"*3.5"H.
Φ7.15"*3.5"H.



White/Black



Black

P23 Suitable for


XSlim/XRim

Φ15.75"*6.61"dp.*120"H.(Max)
Φ19.1"*7.8"dp.*120"H.(Max)
Φ22.32"*8.86"dp.*120"H.(Max)

P24 Suitable for

XSlim/XRim/Thin

Φ14.69"*6.61"dp.*120"H.(Max)
Φ17.83"*7.8"dp.*120"H.(Max)
Φ20.82"*8.86"dp.*120"H.(Max)

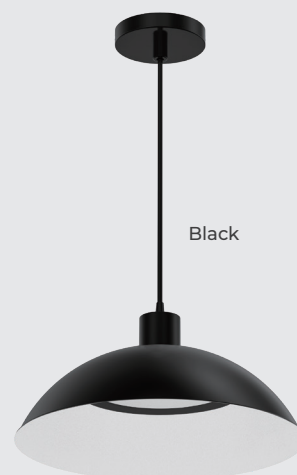

Black